


Texte zu den geplanten neuen EU-Regelungen zur umweltgerechten Produktgestaltung und zur Energieverbrauchs-kennzeichnung in der Beleuchtung – Zusammenstellung <sup>[1]</sup> des Umweltbundesamtes (UBA), Deutschland

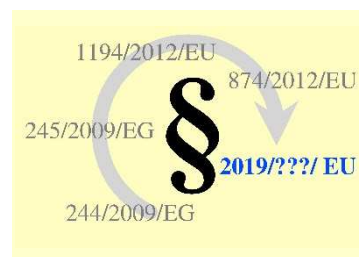

Entwürfe vom Dezember 2018  
von Regelungsausschuß und Fachgespräch

Arbeitshilfe:

**Regelungsausschuß zur Produktgestaltung vom  
17. Dezember 2018**

– Anhänge: Tischvorlagen, aufbereitet –

*Hinweis: Bitte beachten Sie, daß der angehängte Text überwiegend in Englisch verfaßt ist.*

**EN:** Information on the coming EU Lighting Regulations – Ecodesign and Energy Labelling – Compilation <sup>[1]</sup> of the Federal Environment Agency (UBA), Germany

Drafts of December 2018  
from Regulatory Committee and Technical Expert Meeting

**Working aid: Regulatory Committee on product design of  
17 December 2018**

– Annexes: room documents, refurbished –

**FR:** Informations sur les futures réglementations de l'UE concernant l'éclairage – l'écoconception et l'étiquetage énergétique – Compilation <sup>[1]</sup> de l'Agence Fédérale de l'Environnement (UBA), Allemagne

Projets du décembre 2018  
du comité de réglementation et de la réunion d'experts technique

**Aide de travail : Comité de réglementation sur conception des produits du  
17 décembre 2018**

– Annexes : documents de réunion, traité –

*Indication : Veuillez noter que le présent texte n'est disponible qu'en anglais.*

<sup>[1]</sup> <https://www.eup-network.de/de/eup-netzwerk-deutschland/offenes-forum-eu-regelungen-beleuchtung/dokumente/texte/>


DE: ↓

EN: → page III

FR : → page IV

## Texte im Offenen Forum

(**abc** = vorliegender Text)

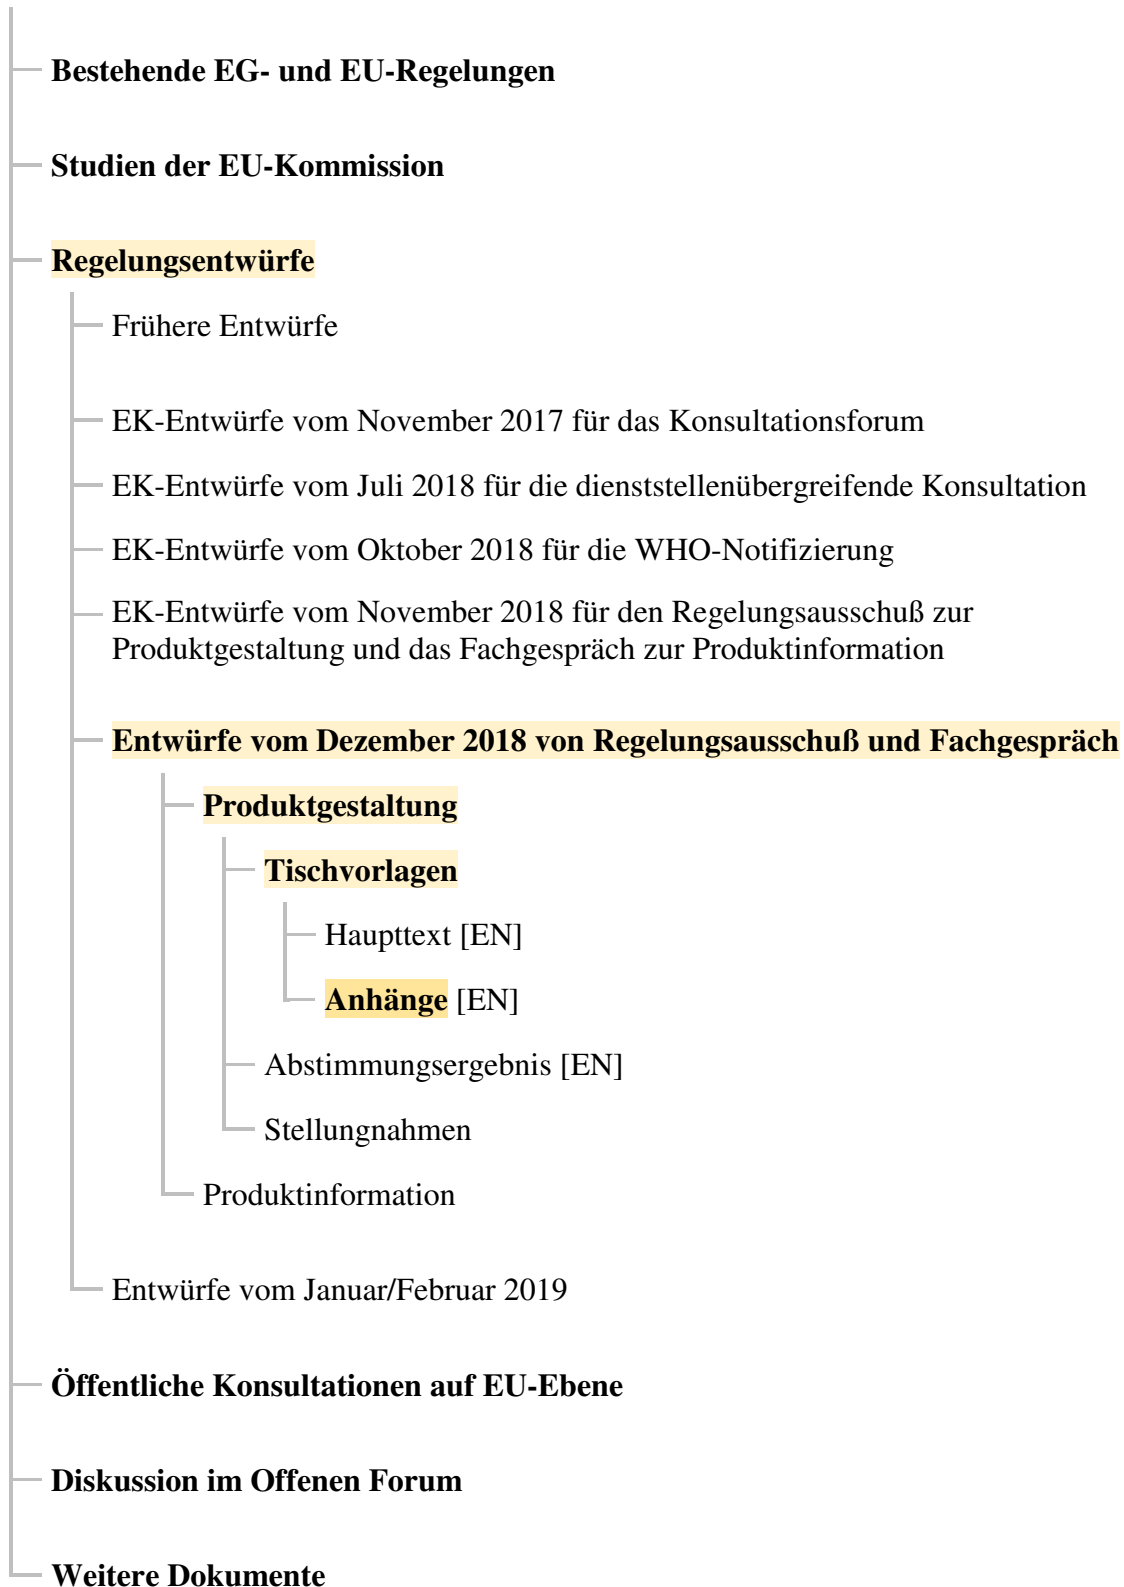

Abkürzungen: ● EG = Europäische Gemeinschaft ● EU = Europäische Union

## Documents in the Open Forum


(**abc** = text at hand)



Abbreviations: ● EC = European Communities ● EU = European Union

## Documents dans le forum ouvert

(**abc** = présent document)

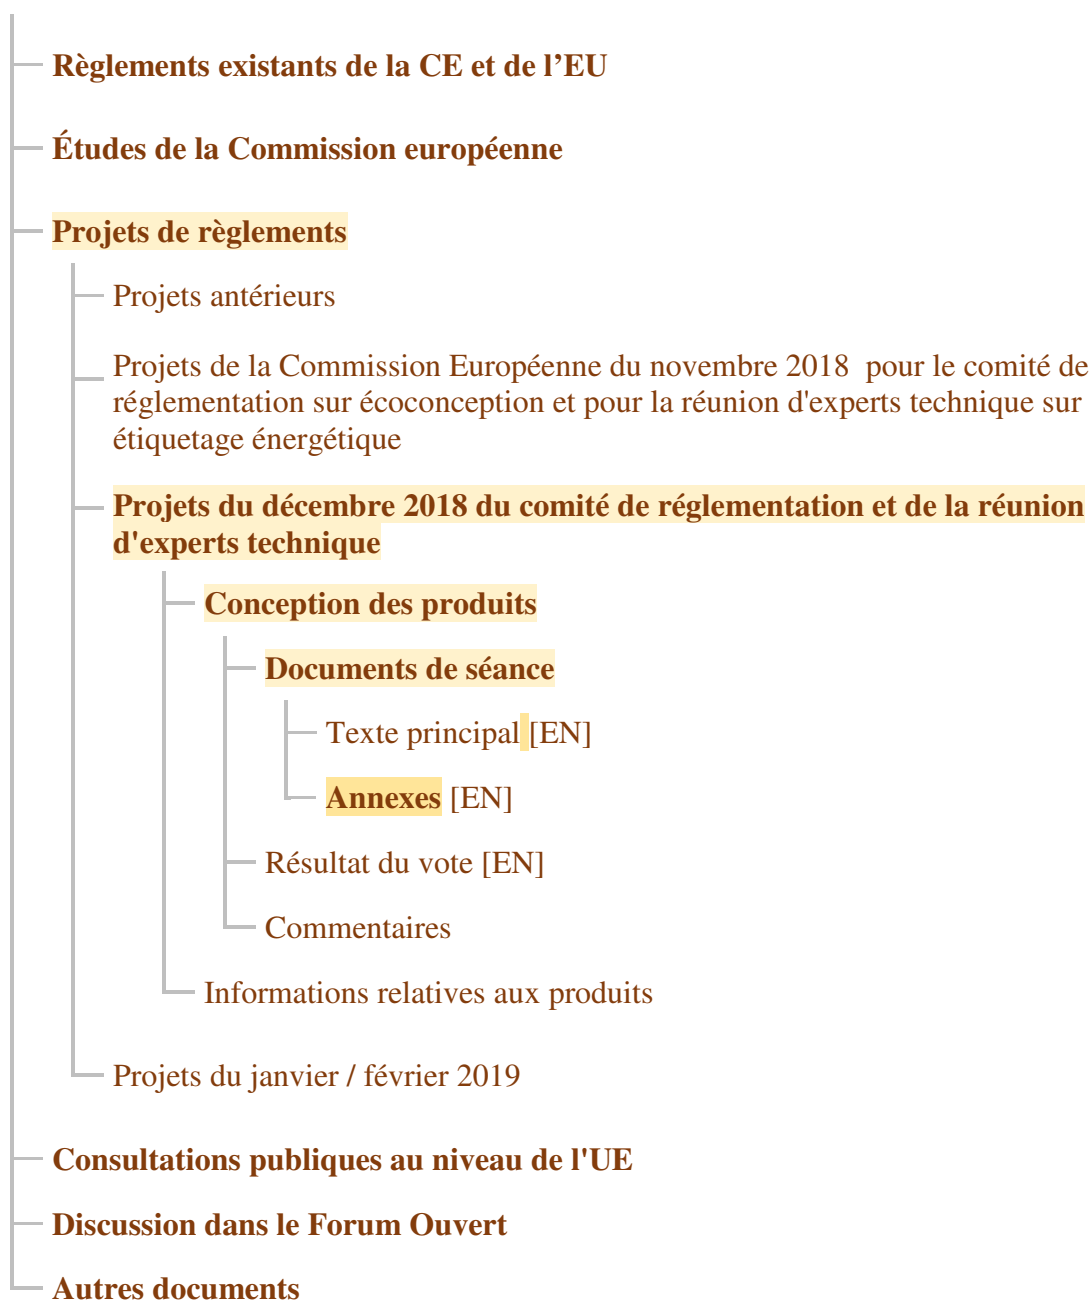

Abréviations : ● CE = Communauté européenne ● UE = Union européenne

Es folgt ein unveränderter Originaltext.

**EN:** The following is an unmodified original text.

**FR:** Ce qui suit est un texte original.



Offenes Forum EU-Regelungen zur Beleuchtung:  
**Besprechungsdokumente des Regelungsausschusses vom  
17. Dezember 2018: Anhänge, digitalisiert und aufbereitet, mit  
Anzeige der Änderungen**  
– Arbeitshilfe von Christoph Mordziol, UBA –

**EN:**

Open Forum EU Policies on Lighting:  
**Meeting documents of the Regulatory Committee of 17 December 2018:  
Annexes, scanned and refurbished, with indication of changes**  
— Working aid by Christoph Mordziol, UBA —

**FR :**

Forum ouvert sur le politique européenne de l'éclairage :  
**Documents de réunion du comité de réglementation du 17 décembre 2018**  
– Annexes, balayés et traités, avec affichage des modifications  
— Aide de travail par Christoph Mordziol, UBA —

Die hier wiedergegebene Meinung muß nicht zwingend mit der Meinung des Umweltbundesamtes übereinstimmen. Bei Übersetzungen handelt es sich, sofern nicht anders gekennzeichnet, um nicht-autorisierte Übersetzungen. ◇ **EN:** This paper does not necessarily reflect the opinion or the policies of the German Federal Environment Agency. Translations are, unless otherwise indicated, unauthorized translations. ◇ **FR :** L'opinion reproduite ici ne doit pas nécessairement coïncider avec l'avis de l'Agence Fédérale de l'Environnement. Les traductions sont, sauf indication contraire, des traductions non autorisées.



# Inhaltsverzeichnis ◇ EN: Contents list → see page e ◇ FR : Table des matières → page g

## Hinweise

*Zu den Textmarkierungen:*

~~abc~~ gelöschter Inhaltspunkt/Text

abc hinzugekommener Inhaltspunkt/Text

~~abc~~ durch Verschiebung entfernter ...

abc ... oder eingefügter Inhaltspunkt/Text

*Zu den Tafeln:*

Das Inhaltsverzeichnis führt nur die Tafeln 1, 2, 3, 4 und 6 auf. Eine Tafel mit der Nummer 5 gibt es im Entwurfstext nicht.

## Vorbemerkungen ..... i

## Überarbeitetes Besprechungsdokument: Anhänge

### Anhang I: Begriffsbestimmungen für die Zwecke der Anhänge .....1

### Anhang II: Anforderungen zur umweltgerechten Produktgestaltung.....10

1. Anforderungen an die Stromeffizienz.....10
  - (a) [Lichtquellen] ..... 10
    - Tabelle 1: Effizienzzielwert ( $\eta$ ) und Verlustfaktor (L) ..... 11
    - Tabelle 2: Korrekturfaktor C für bestimmte Lichtquelleneigenschaften..... 11
  - (b) [Getrennte Betriebsgeräte] ..... 12
    - Tabelle 3: Mindesteffizienz getrennter Betriebsgeräte bei Vollast..... 12
2. Anforderungen an die Betriebseigenschaften.....13
  - (a) [Lichtquellen] ..... 13
    - Tabelle 4: Anforderung an die Betriebseigenschaften von Lichtquellen ..... 13
3. Informationsanforderungen .....14
  - (a) Informationen, die auf der Lichtquelle selbst anzubringen sind ..... 14

→

(b) Informationen, die auf der Verpackung sichtbar anzugeben sind .....	14
[(1) Lichtquellen] .....	14
<u>1. Lichtquellen, die auf dem Markt angeboten werden,         ohne in ein Hüllprodukt eingebaut zu sein</u> .....	14
<u>2. Informationsanforderungen an die im Anhang III,         Punkt 3 genannten Produkte</u> .....	15
(2) Getrennte Betriebsgeräte .....	16
(c) Informationen, die auf frei zugänglichen Internetseiten <u>des Her- stellers, seines Bevollmächtigten oder des Importeurs</u> bereitzu- stellen sind .....	17
(1) Lichtquellen .....	17
(2) Getrennte Betriebsgeräte .....	17
(d) Technikunterlagen .....	18
<del>(1) Lichtquellen</del>	
<del>(2) Getrennte Betriebsgeräte</del> .....	18
<del>(e) Informationsanforderungen an die im Anhang I, Punkt 3 genannten Produkte</del>	
<b>Anhang III: Ausnahmen.....</b>	<b>19</b>
<b>Annex IV: Nachprüfungsverfahren zur Marktaufsicht .....</b>	<b>25</b>
Tabelle 6: Toleranzen bei der Nachprüfung.....	26
<b>Anhang V: Funktionstüchtigkeit nach einer beschleunigten Lebensdauer- prüfung .....</b>	<b>29</b>
<b>Anhang VI: Richtwerte .....</b>	<b>30</b>
<b>Anhang.....</b>	<b>31</b>
<b>Kontaktdaten .....</b>	<b>31</b>

---

# EN: Contents list

## Notes

*On text markers:*

~~abc~~ deleted content / text

abc added content / text

~~abc~~ by moving deleted ...

abc ... or added content / text

*On tables:*

The table of contents lists only tables 1, 2, 3, 4 and 6. There is no Table 5 in the draft text.

## Preliminary remarks ..... i

## Refurbished meeting document: Annexes

<b>Annex I:</b>	<b>Definitions applicable for the Annexes .....</b>	<b>1</b>
<b>Annex II:</b>	<b>Ecodesign Requirements .....</b>	<b>10</b>
	1. Energy Efficiency Requirements .....	10
	(a) [Light sources] .....	10
	Table 1: Threshold efficacy ( $\eta$ ) and end loss factor (L).....	11
	Table 2: Correction factor C depending on light source characteristics .....	11
	(b) [Separate control gear].....	12
	Table 3: Minimum efficiency for separate control gear at full-load .....	12
	2. Functional requirements .....	13
	(a) [Light sources] .....	13
	Table 4: Functional requirements for light sources.....	13
	3. Information requirements .....	14
	(a) Information to be displayed on the light source itself.....	14
	(b) Information to be visibly displayed on the packaging.....	14
	[(1) Light sources] .....	14
	<u>1. Light source placed on the market, not in a containing product</u> .....	14
	<u>2. Information for products specified in Annex III, point 3</u> .....	15
	(2) Separate control gear .....	16
		→

(c) Information to be visibly displayed on a free-access website <u>of</u> <u>the manufacturer, importer or authorised representative</u> .....	17
(1) Light sources .....	17
(2) Separate control gear .....	17
(d) Technical documentation .....	18
<del>(1) Light sources</del>	
<del>(21) Separate control gear</del> .....	18
<del>(e) Information for products specified in Annex III point 3</del>	
<b>Annex III: Exemptions .....</b>	<b>19</b>
<b>Annexe IV: Verification procedure for market surveillance purposes .....</b>	<b>25</b>
Table 6: Verification tolerances .....	26
<b>Annex V: Functionality after accelerated endurance testing .....</b>	<b>29</b>
<b>Annex VI: Benchmarks .....</b>	<b>30</b>
<b>Annex .....</b>	<b>31</b>
<b>Contact data .....</b>	<b>31</b>

---

# FR : Table des matières

## Notes

*Concernant les marqueurs de texte :*

~~abc~~ contenu / texte supprimé

abc contenu / texte ajouté

~~abc~~ contenu / texte supprimé ...

abc ... ou ajouté par déplacement

*Concernant les tableaux :*

La table des matières répertorie uniquement les tableaux 1, 2, 3, 4 et 6. Il n'y a pas de tableau 5 dans le projet de texte.

## Remarques préliminaires..... i

## Document de réunion, traité : Annexes

### Annexe I: Définitions applicables aux fins des annexes.....1

### Annexe II: Exigences d'écoconception .....10

#### 1. Exigences d'efficacité énergétique .....10

##### (a) [Sources lumineuses]..... 10

Tableau 1: Seuil d'efficacité ( $\eta$ ) et facteur de perte (L) ..... 11

Tableau 2: Facteur de correction C en fonction des propriétés de la source lumineuse ..... 11

##### (b) [Appareillages de commande séparées]..... 12

Tableau 3: Efficacité minimales pour appareillages de commande séparées à pleine charge..... 12

#### 2. Exigences fonctionnelles .....13

##### (a) [Sources lumineuses]..... 13

Tableau 4: Exigences de fonctionnalité applicables aux sources lumineuses ..... 13

#### 3. Exigences d'information .....14

##### (a) Informations à afficher sur la source lumineuse elle-même..... 14

→

(b) Informations à faire figurer de manière visible sur l’emballage .....	14
[(1) Sources lumineuses].....	14
<u>1. Sources lumineuses mises sur le marché sans être incorporées dans un produit enfermant</u> .....	14
<u>2. Exigences d'information applicables aux produits précisées à l'annexe III point 3</u> .....	15
(2) Appareillages de commande séparées .....	16
(c) Les informations doivent être affichées de manière visible sur les sites internet librement accessibles <u>du fabricant, de son mandataire ou de l'importateur</u> .....	17
(1) Sources lumineuses .....	17
(2) Appareillages de commande séparées .....	17
(d) Documentation technique .....	18
<del>(1) Sources lumineuses</del>	
<del>(2) Appareillages de commande séparées</del> .....	18
<del>(e) Exigences d'information applicables aux produits précisées à l'annexe I point 3</del>	
<b>Annexe III: Exemptions .....</b>	<b>19</b>
<b>Anhang V: Procédure de vérification aux fins de la surveillance du marché.....</b>	<b>25</b>
Tableau 6: Tolérances utilisées dans la vérification .....	26
<b>Annexe V: Fonctionnalité après un test d'endurance accéléré .....</b>	<b>29</b>
<b>Annexe VI: Critères de référence.....</b>	<b>30</b>
<b>Annexe .....</b>	<b>31</b>
<b>Cordonnées .....</b>	<b>31</b>

---



## Vorbemerkungen ◇ Preliminary remarks ◇ Remarques préliminaires

*Hinweis: Diese Vorbemerkungen sind für alle vier Arbeitshilfen zu den Besprechungsdokumenten vom 17./18. Dezember 2018 identisch.*

Am 16. November 2018 machte die EU-Kommission neue Entwürfe für Regelungen zu Beleuchtungsprodukten mit Anforderungen an die Produktgestaltung und –information bekannt <sup>[1]</sup>. Diese Texte dienten als Grundlage für zwei Treffen:

- den Regelungsausschuß zur Produktgestaltung am 17. Dezember 2018 und
- das Fachgespräch zur Produktinformation am 18. Dezember 2018.

Zu Produktgestaltung und –information gilt jeweils:

- An dem Treffen nahmen Vertreter der EU-Mitgliedstaaten sowie der EU-Kommission teil. Letztere leitete das Treffen.
- Zu dem Regelungsentwurf gab es vor dem Treffen von einer Reihe von EU-Mitgliedstaaten Rückmeldungen.
- Diese Rückmeldungen gingen an die EU-Kommission und sind nicht öffentlich.
- Vor dem Treffen übernahm die EU-Kommission in Eigenregie einen Teil der Rückmeldungen in den Entwurf vom 16. November.

*Please notice: These preliminary remarks are for all four working aids to the discussion documents from 17/18 December 2018 identical.*

On 16 November 2018, the EU Commission announced new draft regulations on lighting products with requirements on product design and product information <sup>[1]</sup>. These texts served as basis for two meetings:

- Regulatory Committee on product design on 17 December 2018 and
- Technical Expert Meeting on product information on 18 December 2018.

The following applies for product design as well as for product information:

- Representatives of EU Member States and of the EU Commission attended the meeting which was led by the Commission.
- A number of member states provided feedback on the draft regulation.
- These feedbacks were sent to the EU Commission and are not public.
- Before the meeting, the EU Commission, on its own, integrated a part of the feedback into the draft regulations of 16 November 2018.


<sup>1</sup> Produktgestaltung: Siehe unter ... ◇ EN: Product design: cf. ◇ FR : Conception des produits : confer ... [https://www.eup-network.de/fileadmin/user\\_upload/Lichtquellen\\_EK\\_2018\\_11\\_16\\_PG\\_gesamt.pdf](https://www.eup-network.de/fileadmin/user_upload/Lichtquellen_EK_2018_11_16_PG_gesamt.pdf)

Produktinformation: Siehe unter ... ◇ EN: Product information: cf. ◇ FR : Informations relatives au produit : confer ... [https://www.eup-network.de/fileadmin/user\\_upload/Lichtquellen\\_EK\\_2018\\_11\\_16\\_PI\\_gesamt.pdf](https://www.eup-network.de/fileadmin/user_upload/Lichtquellen_EK_2018_11_16_PI_gesamt.pdf)

DE	EN   FR (première traduction)
<ul style="list-style-type: none"> <li>• Der sich daraus ergebende Text wurde während des Treffens an eine Wand des Sitzungssaales projiziert und bildete eine wesentliche Diskussionsgrundlage. <ul style="list-style-type: none"> <li>○ Im Falle der Produkt<u>gestaltung</u> umfaßte dies Haupttext (d. h. die Artikel) und Anhänge und</li> <li>○ im Falle der Produkt<u>information</u> zusätzlich den Begründungstext.</li> </ul> </li> <li>• Änderungen, über die sich die Mitgliedstaaten einig zu sein schienen, wurden durch die Kommission in den Text eingearbeitet und blieben als Änderungen zu erkennen.</li> <li>• Nachdem der gesamte Text durchgesprochen worden war, wurde er mit angezeigten Änderungen ausgedruckt und der Ausdruck vervielfältigt. Wie beispielhaft in Bild 1 zu sehen, <ul style="list-style-type: none"> <li>○ zeigen die schwarz-weiß-Kopien neben Textänderungen auch Formatänderungen – der Regelungstext wird verkleinert dargestellt, um den sie daraus ergebenden Platzbedarf zu decken –;</li> <li>○ erscheinen die Textänderungen in Grautönen und</li> <li>○ weisen die Kopien – durch das Druck- oder das Kopiergerät bedingt – auf ein paar Seiten Querstriche auf, die über die gesamte Blattbreite gehen. Dort, wo sie über Text verlaufen, können sie als Striche fehlgedeutet werden, die Textlöschungen kennzeichnen.</li> </ul> </li> <li>• Diese Kopien sind deshalb für eine Weitergabe als eine Vorlage nur wenig geeignet. Hinzu kommt: Werden sie zur</li> </ul>	<ul style="list-style-type: none"> <li>• The resulting text was projected onto a wall of the conference room during the meeting and provided a substantial basis for discussion. <ul style="list-style-type: none"> <li>○ In case of product <u>design</u>, this covered main text (i. e. the articles) and annexes and</li> <li>○ in the case of product <u>information</u>, this covered also the explanatory memorandum.</li> </ul> </li> <li>• Amendments on which the Member States seemed to agree upon, were incorporated into the text by the Commission and remained indicated as changes.</li> <li>• After the whole text had been read through, the resulting text was printed with indicated changes and the printout was duplicated. As Figure <i>Bild 1</i> shows exemplarily, <ul style="list-style-type: none"> <li>○ the black-and-white copies show not only text changes but also format changes — the text of the regulation is reduced in size to cover the resulting space requirements —;</li> <li>○ the text changes appear in shades of grey and</li> <li>○ due to the used printing or copying machine, the copies have horizontal lines on a few pages that run the entire width of the sheet. Wherever they pass over text, they can be misinterpreted as strokes that indicate text deletions.</li> </ul> </li> <li>• These copies are therefore not very suitable as a template for distribution. In addition, if they are digitized to create, for example, PDF files, legibility suffers.</li> </ul>


Erstellung von beispielsweise PDF-Dateien digitalisiert, leidet die Lesbarkeit weiter.

- Die EU-Kommission teilte mit, daß sie keine Dateien der Diskussionstexte herausgebe<sup>[\*]</sup>; es sei aber den Mitgliedstaaten überlassen, was sie mit den erhaltenen Kopien machen.
- Deshalb geben die vorliegende Arbeitshilfe und weitere Texte die Diskussionstexte aufbereitet wieder; vergleiche auch die beiden folgenden Bilder:
  - auf eine Anzeige von Formatänderungen wird verzichtet,
  - die Regelungstexte sind vergrößert,
  - die Fußzeilen sind neu aufgebaut, ...

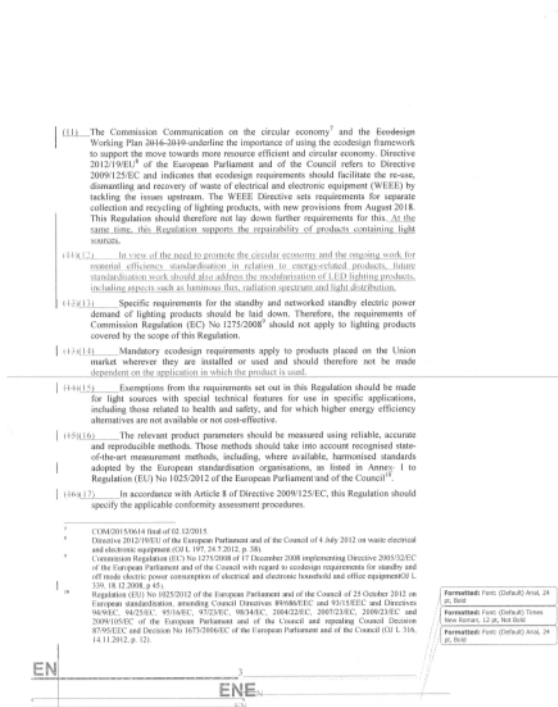

**Bild 1:** Beispiel für die von der EU-Kommission verteilten Kopien. ◇ **EN:** Example of the copies distributed by the EU Commission. ◇ **FR:** Exemple de copies distribuées par la Commission européenne.

- The European Commission told that it does not publish any files of the discussion texts<sup>[\*]</sup>; but it leaves it to the Member States what they do with the copies they have received.
- Therefore, the present working aid and other texts render the discussion texts; Compare the following two pictures:
  - an indication of format changes is omitted,
  - the regulation texts are enlarged,
  - the footers are rebuilt ...

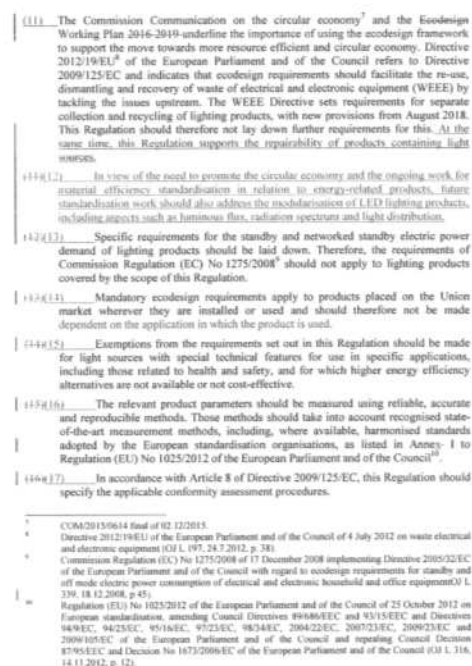


**Bild 2:** Zum selben Beispiel Darstellung der Aufbereitung in der vorliegenden Arbeitshilfe. ◇ **EN:** For the same example representation of the treatment in the present working aid. ◇ **FR:** Pour le même

exemple: Présentation du traitement dans le présent aide de travail.

- ... über die Blattbreite gehende, druckbedingte Striche sind soweit möglich entfernt. Dort, wo ein Strich durch Text verlief und deshalb nicht gelöscht werden konnte, ist er in der Überarbeitung mit einem Delaturzeichen (§) versehen, um Mißverständnisse zu vermeiden, wie dies Bild 3 zeigt.


- ... as far as possible, the printing process-related horizontal lines are removed. Where a line ran through text and therefore could not be deleted, it is provided with a deletion mark (§) to avoid misinterpretation, as shown in Figure Bild 3.

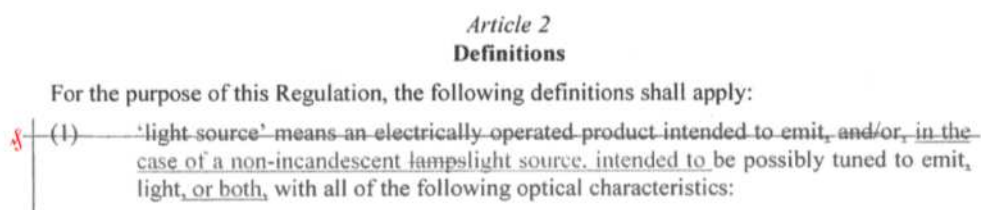

**Bild 3:** Kennzeichnung von druckbedingten Querstrichen, die als Anzeige einer Streichung fehlgedeutet werden könnten. ♦ **EN:** Marking of printing process-related horizontal lines that could be misinterpreted as an indication of deletion. ♦ **FR:** Marquage des courses croisées liées à la technique d'impression qui pourraient être interprétées à tort comme une indication de suppression.

- In den Kopien der Kommission waren Kommentare, wie die Anzeigen der Formatänderungen, am rechten Seitenrand ausgedruckt. In der Überarbeitung sind sie, wie in Bild 4 beispielhaft zu sehen, unter die Texte gesetzt.

- In the copies of the Commission, comments were set on the right side of the page, as this is done with format changes, too. In the present working aid they are placed under the texts, as shown in Figure Bild 4.

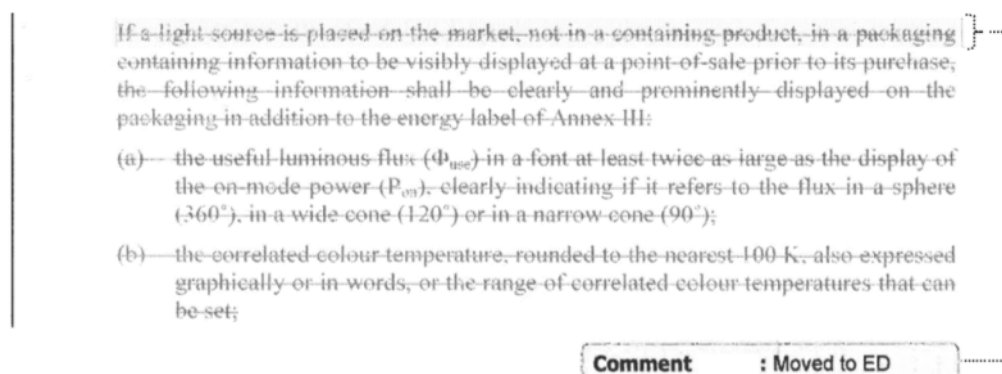

**Bild 4:** Beispiel für einen verschobenen Kommentar ♦ **EN:** Example of a shifted comment. ♦ **FR:** Exemple d'un commentaire déplacé

- Die Seitenzahlangaben folgen dem Original.

- The page numbers follow the original.

\* Nachtrag: Am 8. Februar 2019 informierte die Kommission über das im Falle der Produktgestaltung eingeleitete Ausschußverfahren (engl. comitology). Die hierzu öffentlich zugänglichen Dateien umfassen auch aufbereitete Beschlußtexte, die im Offenen Forum zur Verfügung gestellt werden. ◇ [EN: Supplement: On 8 February 2019, the Commission informed about comitology in the case of product design. The related publicly accessible files also include edited decision texts, which will be made available in the Open Forum.](#)



**Überarbeitetes Besprechungsdokument: Anhänge** ◇ **Refurbished meeting document: Annexes** ◇ **Document de réunion, traité : Annexes**

---



EUROPEAN  
COMMISSION

Brussels, XXX  
[...] (2018) XXX draft

ANNEXES 1 to 6

**ANNEXES**

**to the**

**COMMISSION REGULATION (EU) .../...**

**laying down ecodesign requirements for light sources and separate control gears  
pursuant to Directive 2009/125/EC of the European Parliament and of the Council**

**repealing Commission Regulations (EC) No 244/2009, (EC) No 245/2009 and (EU) No  
1194/2012**



**ANNEX I**  
**Definitions applicable for the Annexes**

The following definitions shall apply ~~for the purposes of the Annexes:~~

- (1) 'mains light source (MLS)' means a light source that can be operated directly on the mains electricity supply. Light sources that operate directly on the mains, and can also operate indirectly on the mains using a separate control gear, shall be considered to be mains light sources;
- (2) 'non-mains light source (NMLS)'; means a light source that ~~is not a mains light source. These light sources requires~~ a separate control gear to operate on the mains;
- (3) 'directional light source' (DLS) means a light source having at least 80 % of total luminous flux within a solid angle of  $\pi$  sr (corresponding to a cone with angle of  $120^\circ$ );
- (4) 'non-directional light source' (NDLS) means a light source that is not a directional light source;
- (5) 'connected light source' (CLS) means a light source including data-connection parts that are physically or functionally inseparable from the light emitting parts to maintain the 'reference control settings'. The light source can have physically integrated data-connection parts in a single inseparable housing, or the light source can be combined with physically separate data-connection parts placed on the market together with the light source as a single product;
- (6) 'connected separate control gear' (CSCG) means a separate control gear including data-connection parts that are physically or functionally inseparable from the actual control gear parts to maintain the 'reference control settings'. The separate control gear can have physically integrated data-connection parts in a single inseparable housing, or the separate control gear can be combined with physically separate data-connection parts placed on the market together with the control gear as a single product;
- (7) 'data-connection parts' means parts that perform any one of the following functions:
  - (a) reception or transmission of wired or wireless data signals and the processing thereof (used to control the light emission function and possibly otherwise);
  - (b) sensing and processing of the sensed signals (used to control the light emission function and possibly otherwise);
  - (c) ~~actuation by audio control (including voice control);~~
  - (d) ~~(e)~~ a combination of these;
- (8) 'colour-tuneable light source' (CTLS) means a light source that can be set to emit light with a large ~~variation~~ variety of colours outside the range defined in Article 2 but can also be set to emit white light inside the range defined in Article 2 for which the light source is within the scope of this Regulation.



The term does not include ~~t~~uneable-white light sources that can only be set to emit light, with different correlated colour temperatures, within the range defined in Article 2, and ~~;~~

The term also does not include dim-to-warm light sources; that shift their white light output to lower correlated colour temperature when dimmed, simulating the behaviour of incandescent light sources, are not considered CTLS;

(9) ~~'colour purity index' or 'excitation purity'~~ means a percentage computed for a CTLS set to emit light of a certain colour, using a procedure further defined in standards, by drawing a straight line on an (x and y) colour space graph from a point with colour coordinates  $x=0,343\text{--}333$  and  $y=0,3303$  (achromatic stimulus point)(~~D65 reference point, point 1~~), going through the point representing the (x and y) colour coordinates of the light source (point 2), and ending on the outer border of the colour space (locus; point 3). The excitation purity ~~colour purity index~~ is computed as the distance between points 1 and 2 divided by the distance between points 1 and 3. The full length of the line represents 100 % colour purity (point on the locus). The achromatic stimulus point~~D65 reference point~~ represents 0 % colour purity (white light);

(10) 'high-luminance light source' (HLLS) means a LED light source with an average luminance greater than 30 cd/mm<sup>2</sup> in the direction of peak intensity;

(11) 'luminance' (in a given direction, at a given point of a real or imaginary surface) means the luminous flux transmitted by an elementary beam passing through the given point and propagating in the solid angle containing the given direction divided by the area of a section of that beam containing the given point (cd/m<sup>2</sup>);

~~(9)~~(12) 'average luminance' (Luminance-HLLS) for a LED light source means the average luminance over a light-emitting area where the luminance is more than 50 % of the peak luminance (cd/mm<sup>2</sup>);

~~(10)~~(13) 'lighting control parts' means parts that are integrated in a light source or in a separate control gear, or physically separated but marketed together with a light source or separate control gear as a single product, that are not strictly necessary for the light source to emit light at full-load, or for the separate control gear to supply the electric power that enables light source(s) to emit light at full-load, but that enable manual- or automatic-, direct- or remote-, control of luminous intensity, chromaticity, correlated colour temperature, light spectrum and/or beam angle. Dimmers shall also be considered as lighting control parts.

The term also includes data-connection parts, but the term does not include products within the scope of Commission Regulation (EC) No 1275/2008<sup>1</sup>;

(14) 'non-lighting parts' means parts that are integrated in a light source, or in a separate control gear, or physically separated but marketed together with a light source or separate control gear as a single product, that are not necessary for the light source to emit light at full-load, or for the separate control gear to supply the electric power

<sup>1</sup> Commission Regulation (EC) No 1275/2008 of 17 December 2008 implementing Directive 2005/32/EC of the European Parliament and of the Council with regard to ecodesign requirements for standby and off mode electric power consumption of electrical and electronic household and office equipment, OJ L 339, 18.12.2008, p. 45.

that enables light source(s) to emit light at full-load, and that are not 'lighting control parts'. Examples include, but are not limited to: speakers (audio), cameras, repeaters for communication signals to extend the range (e.g. WiFi), parts supporting grid balance (switching to own internal batteries when necessary), battery charging, visual notification of events (mail arriving, door bell ringing, alert), use of Light Fidelity (Li-Fi, a bidirectional, high-speed and fully networked wireless communication technology).

The term also includes data-connection parts used for other functions than to control the light emission function;

(+1)(15) 'useful luminous flux' ( $\Phi_{\text{use}}$ ), means the part of the luminous flux of a light source that is considered when determining its energy efficiency:

- for non-directional light sources it is the total flux emitted in a solid angle of  $4\pi$  sr (corresponding to a  $360^\circ$  sphere);
- for directional light sources with beam angle  $\geq 90^\circ$  it is the flux emitted in a solid angle of  $\pi$  sr (corresponding to a cone with angle of  $120^\circ$ );
- for directional light sources with beam angle  $< 90^\circ$  it is the flux emitted in a solid angle of  $0.586\pi$  sr (corresponding to a cone with angle of  $90^\circ$ );

(+2)(16) 'beam angle' of a directional light source means the angle between two imaginary lines in a plane through the optical beam axis, such that these lines pass through the centre of the front face of the light source and through points at which the luminous intensity is 50 % of the centre beam intensity, where the centre beam intensity is the value of luminous intensity measured on the optical beam axis.

For light sources that have different beam angles in different planes, the largest beam angle shall be the one taken into account;

For light sources with user-controllable beam angle, the beam angle corresponding to the 'reference control setting' shall be the one taken into account;

(+3)(17) 'full-load' means:

- the condition of a light source, within the declared operating conditions, in which it emits the maximum (undimmed) initial luminous flux; or
- the operating conditions and loads of the control gear under efficiency measurement as specified in the relevant standards;

(+4)(18) 'no-load mode' means the condition of a separate control gear in which its input is connected to the mains power source and its output is intentionally disconnected from light sources, and, if applicable, from data-connection parts, lighting control parts and non-lighting parts. If these parts cannot be disconnected, they shall be switched off and their power consumption shall be minimised following the manufacturer's instructions. No-load mode only applies to a separate control gear for which the manufacturer or importer has declared in the technical documentation that it has been designed for this mode;

(+5)(19) 'standby mode' means the condition of a light source or of a separate control gear, where it is connected to the power supply but the light sources are intentionally not

emitting light, and the light source or control gear is awaiting a control signal (~~from a source different from a network~~) to return to a state with light emission. Lighting control parts enabling the standby function shall be in their control mode. Non-lighting parts shall be disconnected or switched off or their power consumption shall be minimised following manufacturer's instructions;

(16)(20) 'networked standby mode' means the condition of a ~~connected light source (CLS)~~ or a ~~connected separate control gear (CSCG)~~ where it is connected to the power supply but the light source is intentionally not emitting light or the control gear does not supply the electric power that enables light source(s) to emit light, and is awaiting a remotely initiated trigger to return to a state with light emission. Lighting control parts shall be in their control mode. Non-lighting parts shall be disconnected or switched off or their power consumption shall be minimised following manufacturer's instructions;

(17)(21) 'control mode' means the condition of lighting control parts where they are connected to the light source and/or to the separate control gear and performing their functions in such a way that a control signal can be internally generated or a remotely initiated trigger can be received, by wire or wireless, and processed to lead to a change in the light emission of the light source or to a corresponding desired change in the power supply by the separate control gear;

(18)(22) 'remotely initiated trigger' means a signal that comes from outside the light source or separate control gear via a network;

(19)(23) 'control signal' means an analogue or digital signal transmitted to the light source or separate control gear wirelessly or wired either via voltage modulation in separate control cables or via a modulated signal in the supply voltage. The signal transmission is not through a network but e.g. from an internal source or from a remote control delivered with the product;

(20)(24) 'network' means a communication infrastructure with a topology of links, an architecture, including the physical components, organisational principles, communication procedures and formats (protocols);

(21)(25) 'on-mode power' ( $P_{on}$ ), expressed in  $W_{watt}$ , means the electric power consumption of a light source in full-load with all lighting control parts and non-lighting parts disconnected. If these parts cannot be disconnected, they shall be switched off or their power consumption shall be minimised following the manufacturer's instructions. In case of a ~~non-mains light source (NMLS)~~ that requires a separate control gear to operate,  $P_{on}$  can be measured directly on the input to the light source, or  $P_{on}$  is determined using a control gear with known efficiency, whose electric power consumption is subsequently subtracted from the measured mains power input value;

(22)(26) 'no-load power' ( $P_{no}$ ), expressed in  $W_{watt}$ , is the electric power consumption of a separate control gear in no-load mode;

(23)(27) 'standby power' ( $P_{sb}$ ), expressed in  $W_{watt}$ , is the electric power consumption of a light source or of a separate control gear in standby mode;

(24)(28) 'networked standby power' ( $P_{\text{net}}$ ), expressed in  $W_{\text{watt}}$ , is the electric power consumption of a ~~connected light source (CLS)~~ or of a ~~connected separate control gear (CSCG)~~ in networked standby mode;

(25)(29) 'reference control settings' (RCS) means a control setting or a combination of control settings that is used to verify compliance of a light source with this Regulation. These settings are relevant for light sources that allow the end-user to control, manually or automatically, directly or remotely, the luminous intensity, colour, correlated colour temperature, spectrum, and/or beam angle of the emitted light.

In principle, the reference control settings shall be those predefined by the manufacturer as factory default values and encountered by the user at first installation (out-of-the-box values). If the installation procedure provides for an automatic software update during first installation, or if the user has the option to perform such an update, the resulting change in settings (if any) shall be taken into account.

If the out-of-the-box value is deliberately set differently from the reference control setting (e.g. at low power for safety purposes), the manufacturer shall indicate in the technical documentation how to recall the reference control settings for compliance verification and provide a technical justification why the out-of-the-box value is set different from the reference control setting.

The light source manufacturer shall define the reference control settings such that:

- the light source is within the scope of this Regulation according to Article 1 and none of the conditions for exemption applies;
- lighting control parts and non-lighting parts are disconnected or switched-off or, in case this is not possible, the power consumption of these parts is minimal;
- the full-load condition is obtained;
- when the end-user opts to reset factory defaults, the reference control settings are obtained.

For light sources that allow the manufacturer of a containing product to make implementation choices that influence light source characteristics (e.g. definition of the operating current(s); thermal design), and that cannot be controlled by the end-user, the reference control settings need not be defined. In that case the nominal test conditions as defined by the light source manufacturer apply;

(26)(30) 'high-pressure mercury light source' means a high intensity discharge light source in which the major portion of light is produced, directly or indirectly, by radiation from predominantly vaporised mercury operating at a partial pressure in excess of 100 kilopascals;

(27)(31) 'metal halide light source' (MH) means a high intensity discharge light source in which the light is produced by radiation from a mixture of metallic vapour, metal halides and the products of the dissociation of metal halides. MH light sources may have one ('single-ended') or two ('double-ended') connectors to their electricity

supply. The material for the arc tube of MH light sources can be quartz (QMH) or ceramic (CMH);

- | ~~(28)~~(32) 'compact fluorescent light source' (CFL) means a single-capped fluorescent light source with a bent-tube construction designed to fit in small spaces. CFLs may be primarily spiral-shaped (i.e. curly forms) or primarily shaped as connected multiple parallel tubes, with or without a second bulb-like envelope. CFLs are available with (CFLi) or without (CFLni) a physically integrated control gear;
- | ~~(29)~~(33) 'T2', 'T5', 'T8', 'T9' and 'T12' means a tubular light source with a diameter of approximately 7, 16, 26, 29 and 38 mm respectively, as defined in standards. The tube can be straight (linear) or bent (e.g. U-shaped, circular);
- | ~~(30)~~(34) 'LFL T5-HE' means a high-efficiency linear fluorescent T5 light source with driving current lower than 0,2 A;
- | ~~(34)~~(35) 'LFL T5-HO' means a high-output linear fluorescent T5 light source with driving current higher than or equal to 0,2 A;
- | ~~(32)~~(36) 'LFL T8 2-foot', 'LFL T8 4-foot' or 'LFL T8 5-foot' means a linear T8 fluorescent light source with a length of approximately 600 mm (2 feet), 1200 mm (4 feet) or 1500 mm (5 feet) respectively, as defined in standards;
- | ~~(33)~~(37) 'magnetic induction light source' means a light source using fluorescent technology, where energy is transferred to the gas discharge by means of an induced high-frequency magnetic field, instead of using electrodes placed inside the gas discharge. The magnetic inductor can be external or internal to the shape of the discharge tube;
- | ~~(34)~~(38) 'G4', 'GY6.35' and 'G9' means an electrical interface ~~for~~of a light source consisting of two small pins at distances of 4, 6,35 and 9 mm respectively, as defined in standards;
- | ~~(35)~~(39) 'HL R7s' means a mains-voltage, double-capped, linear halogen light source with a cap diameter of 7 mm;
- | ~~(36)~~(40) 'G9.5', 'GX9.5', 'GY9.5', 'G9.5HPL', 'G16d', 'GX16d', 'GY16', 'G22' and 'G38' means an electrical interface ~~for~~of a light source consisting of two pins at distances of 9,5, 16, 22 and 38 mm respectively, as defined in standards. 'G9.5HPL' includes a heatsink of specific dimensions as used on high-performance halogen lamps, and may include additional pins for grounding purposes;
- | ~~(37)~~(41) 'P28s', 'P40s' and 'PGJX50' means an electrical interface ~~for~~of a light source that uses a flange contact to correctly position (pre-focus) the light source in a reflector, as defined in standards;
- | ~~(38)~~(42) 'QXL (Quick eXchange Lamp)' means an electrical interface ~~for~~of a light source consisting, on the light source side, of two lateral tabs including the electrical contact surfaces and, on the opposite (rear) side, of a central protrusion allowing the light source to be grabbed with two fingers. It ~~has been~~is specifically designed for use in a class-specific type of stage lighting luminaires, in which the light source is inserted from the rear of the luminaire using a one quarter turn rotation to fix or unfix it;



- | (39)(43) 'battery-operated' means a product that operates only on direct current (DC) supplied from a source contained in the same product, without being connected directly or indirectly to the mains electricity supply;
- | (40)(44) 'second envelope' means a second outer envelope on an HID light source that is not required for the production of light, such as an external sleeve for preventing mercury and glass release into the environment in case of lamp breakage. In determining the presence of a second envelope, the HID arc tubes shall not count as an envelope;
- | (41)(45) 'non-clear envelope' for an HID light source means a non-transparent outer envelope or outer tube in which the light producing arc tube is not visible;
- | (42)(46) 'anti-glare shield' means a mechanical or optical reflective or non-reflective impervious baffle designed to block direct visible radiation emitted from the light emitter in a directional light source, in order to avoid temporary partial blindness (disability glare) if viewed directly by an observer. It does not include surface coating of the light emitter in the directional light source;
- | (43)(47) 'control gear efficiency' ~~is~~ means the output power that supplies a light source divided by the input power of a separate control gear using the conditions and methods defined in standards. Any lighting control parts and non-lighting parts are disconnected, switched off or set to minimum power consumption according to manufacturer's instructions and subtracting this power consumption from the overall input power;
- | (44)(48) 'functionality after endurance testing' means the functionality of a LED or OLED light source after endurance testing as defined in Annex V;
- | (45)(49) 'flicker' means the perception of visual unsteadiness induced by a light stimulus, the luminance or spectral distribution of which fluctuates with time, for a static observer in a static environment. The fluctuations can be periodic and non-periodic and may be induced by the light source itself, the power source or other influencing factors.  
  
The metric for flicker used in this Regulation is the parameter 'Pst LM', where 'st' stands for short term and 'LM' for light flickermeter method, as defined in standards. A value Pst LM=1 means that the average observer has a 50 % probability of detecting flicker;
- | (46)(50) 'stroboscopic effect' means a change in motion perception induced by a light stimulus, the luminance or spectral distribution of which fluctuates with time, for a static observer in a non-static environment. The fluctuations can be periodic and non-periodic and may be induced by the light source itself, the power source or other influencing factors.  
  
The metric for the stroboscopic effect used in this Regulation is the 'SVM' (stroboscopic visibility measure), as defined in standards. SVM = 1 represents the visibility threshold for an average observer;
- | (47)(51) 'declared value' for a parameter means the value given by the manufacturer or importer in the technical documentation pursuant to point 2 of Annex IV to Directive 2009/125/EC;


- | (48)(52) 'specific effective radiant ultraviolet power' (mW/klm) means the effective power of the ultraviolet radiation of a light source weighted according to the spectral correction factors and related to its luminous flux;
- | (49)(53) 'luminous intensity' (candela or cd) means the quotient of the luminous flux leaving the source and propagated in the element of solid angle containing a given direction, by the element of solid angle;
- | (50)(54) 'correlated colour temperature' (CCT [K]) means the temperature of a Planckian (black body) radiator whose perceived colour most closely resembles that of a given stimulus at the same brightness and under specified viewing conditions;
- | (51)(55) 'colour consistency' means the maximum deviation of the initial (after a short period of time), spatially averaged chromaticity coordinates (x and y) of a single light source from the chromaticity centre point (cx and cy) declared by the manufacturer or the importer, expressed as the size (in steps) of the MacAdam ellipse formed around the chromaticity centre point (cx and cy);
- | (52)(56) 'displacement factor ( $\cos \phi_1$ )' means the cosine of the phase angle  $\phi_1$  between the fundamental harmonic of the mains supply voltage and the fundamental harmonic of the mains current. It is used for mains light sources using LED- or OLED-technology. The displacement factor is measured at full-load, for the reference control settings where applicable, with any lighting control parts in control mode and non-lighting parts disconnected, switched off or set to minimum power consumption according to the manufacturer's instructions;
- | (53)(57) 'lumen maintenance factor' ( $X_{LMF}$ ) means the ratio of the luminous flux emitted by a light source at a given time in its life to the initial luminous flux;
- | (54)(58) 'survival factor' (SF) means the defined fraction of the total number of light sources that continue to operate at a given time under defined conditions and switching frequency;
- | (55)(59) 'lifetime' for LED and OLED light sources means the time in hours between the start of their use and the moment when for 50 % of a population of light sources the light output has gradually degraded to a value below 70 % of the initial luminous flux. This is also referred to as the  $L_{70}B_{50}$  lifetime;
- | (56) — ~~'equivalent model' means a model with the same relevant technical and performance characteristics as another model placed on the market under a different commercial code;~~
- | (57) — ~~'end-user' means a natural person buying or expected to buy a product for purposes which are outside his trade, business, craft or profession;~~
- | (58)(60) 'photosensitive patients' means people with a specific condition causing photosensitive symptoms and who experience adverse reactions to natural and/or certain forms of artificial lighting technology;
- | (59)(61) 'projected light-emitting surface area (A)' is the surface area in mm<sup>2</sup> (square millimetres) of the view in an orthographic projection of the light-emitting surface from the direction with the highest light intensity, where the light-emitting surface area is the surface area of the light source that emits light with the declared optical

characteristics, such as the approximately spherical surface of an arc (a), cylindrical surface of a filament coil (b) or a gas discharge lamp (c, d), flat or semi-spherical envelope of a light-emitting diode (e).

For light sources with a non-clear envelope or with anti-glare shield, the light-emitting surface area is the entire area through which light leaves the light source.

For light sources containing more than one light emitter, the projection of the smallest gross volume enveloping all emitters shall be taken as the light-emitting surface.

For HID light sources definition (a) applies, unless the dimensions defined in (d) apply with  $L > D$ , where  $L$  is the distance between the electrode tips and  $D$  the inner diameter of the arc tube.

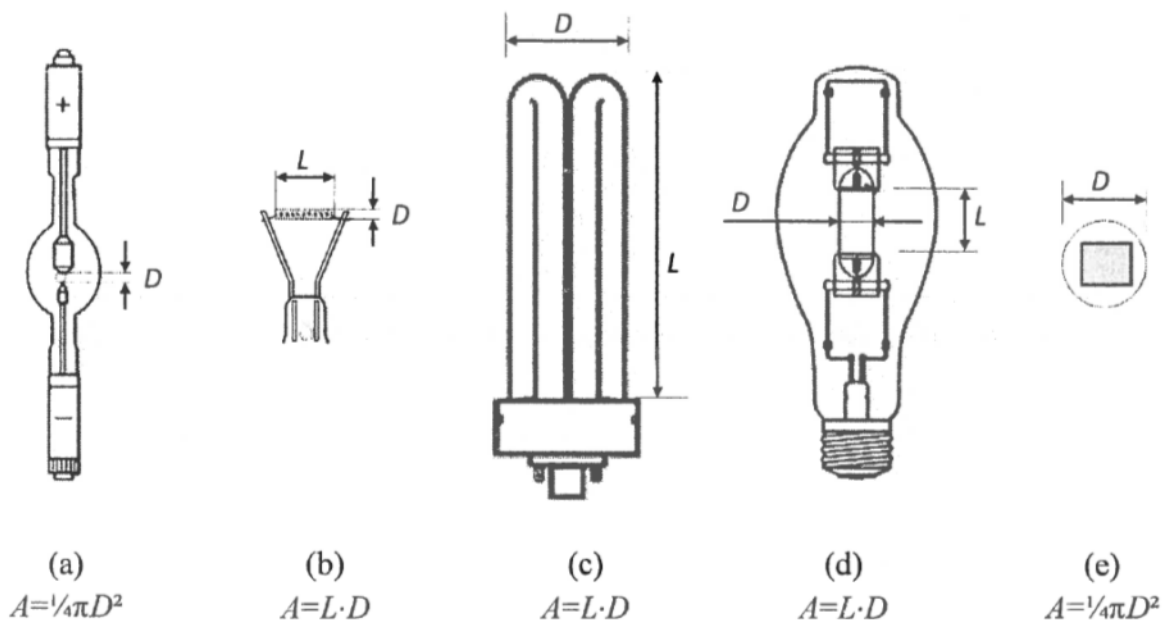



## ANNEX II

### Ecodesign requirements

For the purposes of compliance and verification of compliance with the requirements of this Regulation, measurements and calculations shall be made using harmonised standards the reference numbers of which have been published for this purpose in the *Official Journal of the European Union*, or other reliable, accurate and reproducible methods, which take into account the generally recognised state-of-the-art.

#### 1. Energy efficiency requirements:

- (a) From 1 September 2021, the declared power consumption of a light source  $P_{on}$  shall not exceed the maximum allowed power  $P_{onmax}$  (in  $W$ ), defined as a function of the declared useful luminous flux  $\Phi_{use}$  (in  $lm$ ) and the declared colour rendering index CRI (-) as follows:

$$P_{onmax} = C \cdot (L + \Phi_{use} / (F \cdot \eta)) \cdot R;$$

where:

- The values for threshold efficacy ( $\eta$  in  $lm/W$ ) and end loss factor ( $L$  in  $W$ ) are specified in Table 1, depending on the light source type. They are constants used for computations and do not reflect true parameters of light sources. The threshold efficacy is not the minimum required efficacy; the latter can be computed by dividing the useful luminous flux by the computed maximum allowed power.
- Basic values for correction factor ( $C$ ) depending on light source type, and additions to  $C$  for special light source features are specified in Table 2.
- Efficacy factor ( $F$ ) is:
  - 1,00 for non-directional light sources (NDLS, using total flux)
  - 0,85 for directional light sources (DLS, using flux in a cone)
- CRI factor ( $R$ ) is:
  - 0,65 for  $CRI \leq 25$ ;
  - $(CRI+80)/160$  for  $CRI > 25$ , rounded to two decimals

**Table 1 — Threshold efficacy ( $\eta$ ) and end loss factor (L)**

<b>Light source description</b>	<b><math>\eta</math></b>	<b>L</b>
	[lm/W]	[W]
LFL T5-HE	98,8	1,9
LFL T5-HO, $4000 \leq \Phi \leq 5000$ lm	83,0	1,9
LFL T5-HO, other lm output	79,0	1,9
FL T5 circular	79,0	1,9
FL T8 other than LFL 2-, 4- and 5-foot (including FL T8 U-shaped)	89,7	4,5
From 1 September 2023, for FL T8 of 2-, 4- and 5-foot	120,0	1,5
FL using magnetic induction, any length/flux	70,2	2,3
CFLni	70,2	2,3
FL T9 circular	71,5	6,2
HPS single-ended	88,0	50,0
HPS double-ended	78,0	47,7
MH $\leq 405$ W single-ended	84,5	7,7
MH $> 405$ W single-ended	79,3	12,3
MH ceramic double-ended	84,5	7,7
MH quartz double-ended	79,3	12,3
Organic light-emitting diode (OLED)	65,0	1,5
Until 1 September 2023: HL G9, G4 and GY6.35	19,5	7,7
HL R7s $\leq 2700$ lm	26,0	13,0
Other light sources in scope not mentioned above	120,0	1,5*

\* For connected light sources (CLS) a factor L=2,0 shall be applied.

**Table 2 — Correction factor C depending on light source characteristics**

<b>Light source type</b>	<b>Basic C value</b>
Non-directional (NDLS) not operating on mains (NMLS)	1,00
Non-directional (NDLS) operating on mains (MLS)	1,08
Directional (DLS) not operating on mains (NMLS)	1,15
Directional (DLS) operating on mains (MLS)	1,23
<b>Special light source feature</b>	<b>Bonus on C</b>
FL or HID with CCT $> 5000$ K	+0,10
FL with CRI $> 90$	+0,10
HID with second envelope	+0,10
MH NDLS $> 405$ W with non-clear envelope	+0,10
DLS with anti-glare shield	+0,20

Colour-tuneable light source (CTLS)	+0,10
High luminance light sources (HLLS)	$+ 0,0058 \times \text{Luminance-HLLS} - 0,0167$

Where applicable, bonuses on correction factor C are cumulative.

The bonus for HLLS shall not be combined with the basic C-value for DLS (basic C-value for NDLS shall be used for HLLS).

Light sources that allow the end-user to adapt the spectrum and/or the beam angle of the emitted light, thus changing the values for useful luminous flux, colour rendering index (CRI) and/or correlated colour temperature (CCT), and/or changing the directional/non-directional status of the light source, shall be evaluated using the reference control settings, ~~at full-load.~~

The standby power  $P_{sb}$  of a light source shall not exceed 0,5 W.

The networked standby power  $P_{net}$  of a connected light source shall not exceed 0,5 W.

The allowable values for  $P_{sb}$  and  $P_{net}$  shall not be added together.

- (b) ~~The allowable values for  $P_{sb}$  and  $P_{net}$  shall not be added together.~~ From 1 September 2021, the values set in Table 3 for the minimum energy efficiency requirements of a separate control gear operating at full-load shall apply:

**Table 3 — Minimum energy efficiency for separate control gear at full-load**

Declared output power of the control gear ( $P_{cg}$ ) or declared power of the light source ( $P_{ls}$ ) in W, as applicable	Minimum energy efficiency
<u>Control gear for HL light sources</u> all wattages $P_{cg}$	0,91
<u>Control gear for FL light sources</u> $P_{ls} \leq 5$ $5 < P_{ls} \leq 100$ $100 < P_{ls}$	0,71 $P_{ls} / (2 \cdot \sqrt{(P_{ls} / 36) + 38 / 36} \cdot P_{ls} + 1)$ 0,91
<u>Control gear for HID light sources</u> $P_{ls} \leq 30$ $30 < P_{ls} \leq 75$ $75 < P_{ls} \leq 105$ $105 < P_{ls} \leq 405$ $405 < P_{ls}$	0,78 0,85 0,87 0,90 0,92
<u>Control gear for LED or OLED light sources</u> all wattages $P_{cg}$	$P_{cg}^{0,81} / (1,09 \cdot P_{cg}^{0,81} + 2,10)$

Multi-wattage separate control gears shall comply with the requirements in Table 3 according to the maximum declared power on which they can operate.

The no-load power  $P_{no}$  of a separate control gear shall not exceed 0,5 W. This applies only to separate control gear for which the manufacturer or importer has declared in the technical documentation that it has been designed for no-load mode.

The standby power  $P_{sb}$  of a separate control gear shall not exceed 0,5 W.

The networked standby power  $P_{net}$  of a connected separate control gear shall not exceed 0,5 W. The allowable values for  $P_{sb}$  and  $P_{net}$  shall not be added together.

2. Functional requirements:

- (a) From 1 September 2021, the functional requirements specified in Table 4 shall apply for light sources:

**Table 4 — Functional requirements for light sources**

Colour rendering	$CRI \geq 80$ (except for HID with $\Phi_{use} > 4$ klm and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a $CRI < 80$ , when a clear indication to this effect is shown on the light source packaging and in all relevant printed and electronic documentation)
Displacement factor (DF, $\cos \phi_1$ ) at power input $P_{on}$ for LED and OLED MLS	No limit at $P_{on} \leq 5$ W, $DF \geq 0,5$ at $5 \text{ W} < P_{on} \leq 10$ W, $DF \geq 0,7$ at $10 \text{ W} < P_{on} \leq 25$ W $DF \geq 0,9$ at $25 \text{ W} < P_{on}$
Lumen maintenance factor (for LED and OLED)	The lumen maintenance factor $X_{LMF}$ % after endurance testing according to Annex V shall be at least $X_{LMF,MIN}$ % calculated as follows: $X_{LMF,MIN} \% = 100 * e^{\frac{(3\,000 * \ln(0.7))}{L_{70}}}$ where $L_{70}$ is the declared $L_{70}B_{50}$ lifetime (in hours) If the calculated value <u>Upper limit</u> for $X_{LMF,MIN}$ % exceeds 96,0 %, an $X_{LMF,MIN}$ value of 96,0 % shall be used <u>the calculated required lumen maintenance of the sample shall not exceed 96,0 %</u> (i.e., $X_{LMF,MIN} \leq 96,0$ %)
Survival factor (for LED and OLED)	Light sources should be operational as specified in row "Survival factor (for LED and OLED)" of Annex IV, Table 6, following the endurance testing given in Annex V.
Colour consistency for LED and OLED light sources	Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.
Flicker for LED and OLED MLS	$Pst \text{ LM} \leq 1,0$ at full-load

**Comment** : To be added to information requirements (in labelling)

Stroboscopic effect for LED and OLED MLS	$SVM \leq 04,46$ at full-load (except for HID with $\Phi_{use} > 4$ klm and for light sources intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a $CRI < 80$ )
--	---

### 3. Information requirements:

From 1 September 2021 the following information requirements shall apply:

#### (a) Information to be displayed on the light source itself

For all light sources, except CTLS, LFL, CFLni, other FL, and HID, the value and physical unit of the useful luminous flux ( $lm$ ) and correlated colour temperature ( $K$ ) shall be displayed in a legible font on the surface if, after the inclusion of safety-related information, there is sufficient space available for it without unduly obstructing the light emission.

For directional light sources, the beam angle ( $^{\circ}$ ) shall also be indicated.

If there is room for only two values, the useful luminous flux and the correlated colour temperature shall be displayed. If there is room for only one value, the useful luminous flux shall be displayed.

#### (b) Information to be visibly displayed on the packaging

##### 1. Light source placed on the market, not in a containing product

If a light source is placed on the market, not in a containing product, in a packaging containing information to be visibly displayed at a point-of-sale prior to its purchase, the following information shall be clearly and prominently displayed on the packaging:

- the useful luminous flux ( $\Phi_{use}$ ) in a font at least twice as large as the display of the on-mode power ( $P_{on}$ ), clearly indicating if it refers to the flux in a sphere ( $360^{\circ}$ ), in a wide cone ( $120^{\circ}$ ) or in a narrow cone ( $90^{\circ}$ );
- the correlated colour temperature, rounded to the nearest 100 K, also expressed graphically or in words, or the range of correlated colour temperatures that can be set;
- the beam angle in degrees (for directional light sources), or the range of beam angles that can be set;
- electrical interface details, e.g. cap- or connector-type, type of power supply (e.g. 230 V AC 50 Hz, 12 V DC);
- the  $L_{70}B_{50}$  lifetime for LED and OLED light sources, expressed in hours;
- the on-mode power ( $P_{on}$ ), expressed in W;
- the standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging;
- the networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging;

- (i) the colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set;
- (j) if CRI<80, and the light source is intended for use in outdoor applications, industrial applications or other applications where lighting standards allow a CRI<80, a clear indication to this effect. For HID light sources with useful luminous flux > 4000 lm, this indication is not mandatory;
- (k) if the light source is designed for optimum use in non-standard conditions (such as ambient temperature  $T_a \neq 25\text{ }^{\circ}\text{C}$  or specific thermal management is necessary): information on those conditions;
- (l) a warning if the light source cannot be dimmed or can be dimmed only with specific dimmers or with specific wired or wireless dimming methods. In the latter cases a list of compatible dimmers and/or methods shall be provided on the manufacturer's website;
- (m) if the light source contains mercury: a warning of this, including the mercury content in mg rounded to the first decimal place;
- (n) if the light source is within the scope of Directive 2012/19/EU, without prejudice to marking obligations pursuant to Article 14(4) of Directive 2012/19/EU, or contains mercury: a warning that it shall not be disposed of as unsorted municipal waste.

Items (a) to (d) shall be displayed on the packaging in the direction meant to face prospective buyer; for other items this is also recommended, if space permits.

For light sources that can be set to emit light with different characteristics, the information shall be reported for the reference control settings. In addition, a range of obtainable values may be indicated.

The information does not need to use the exact wording on the list above. Alternatively, it may be displayed in the form of graphs, drawings or symbols.

## 2. Information for products specified in Annex III, point 3

For the light sources and separate control gears specified in Annex III, point 3, the intended purpose shall be stated in the technical documentation for compliance assessment as per Article 5 of this Regulation and on all forms of packaging, product information and advertisement, together with an explicit indication that the light source or separate control gear is not intended for use in other applications.

The technical documentation file drawn up for the purposes of conformity assessment, in accordance with Article 5 of this Regulation shall list the technical parameters that make the product design specific to qualify for the exemption.

In particular for light sources indicated in Annex III, point 3(p), it shall be stated: 'This light source is only for use by photo sensitive patients. Use of this light source will lead to increased energy cost compared to an equivalent more energy efficient product.'

(1) — Light sources:

~~Light sources within the scope of this Regulation are within the scope of Regulation (EU) [OP, please insert here references of the accompanying energy labelling regulation] supplementing Regulation (EU) 2017/1369<sup>2</sup> with regard to energy labelling for light sources. As concerns the information to be visibly displayed on the packaging of light sources, manufacturers and importers shall apply the requirements set out in Annex V of Regulation (EU) [OP, please insert here references of the accompanying energy labelling regulation].~~

(2) **Separate control gears:**

If a separate control gear is placed on the market as a stand-alone product and not as a part of a containing product, in a packaging containing information to be visibly displayed to potential buyers, prior to their purchase, the following information shall be clearly and prominently displayed on the packaging:

- (a) the maximum output power of the control gear (for HL, LED and OLED) or the power of the light source for which the control gear is intended (for FL and HID);
- (b) the type of light source(s) for which it is intended;
- (c) the efficiency in full-load, expressed in percentage;
- (d) the no-load power ( $P_{no}$ ), expressed in W and rounded to the second decimal, or the indication that the gear is not intended to operate in no-load mode. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in the technical documentation and on websites;
- (e) the standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in the technical documentation and on websites;
- (f) where applicable, the networked standby power ( $P_{net}$ ), expressed in W and rounded to the second decimal. If the value is zero, it may be omitted from the packaging but shall nonetheless be declared in the technical documentation and on websites;
- (g) a warning if the control gear is not suitable for dimming of light sources or can be used only with specific types of dimmable light sources or using specific wired or wireless dimming methods. In the latter cases, detailed information on the conditions in which the control gear can be used for dimming shall be provided on the manufacturer's or importer's website;
- (h) a QR-code redirecting to a free-access website of the manufacturer, importer or authorised representative~~website optimised for mobile~~

<sup>2</sup> ~~Regulation (EU) 2017/1369 of the European Parliament and of the Council of 28 July 2017 setting a framework for energy labelling and repealing Directive 2010/30/EU, OJ L 198, 28.7.2017, p. 1.~~

devices, or the internet address for such a website, where full information on the control gear can be found.

The information does not need to use the exact wording on the list above. Alternatively, it may be displayed in the form of graphs, drawings or symbols.

- (c) Information to be visibly displayed on a free-access website of the manufacturer, importer or authorised representative:

(1) Light sources:

Light sources within the scope of this Regulation are within the scope of Regulation (EU) *[OP, please insert here references of the accompanying energy labelling regulation]* supplementing Regulation (EU) 2017/1369 with regard to energy labelling for light sources. As concerns the information to be visibly displayed on a free-access website, manufacturers and importers shall apply the requirements set out in Annex V of Regulation (EU) *[OP, please insert here references of the accompanying energy labelling regulation]* in relation to the product database set out in Article 4 of Regulation (EU) 2017/1369.

(2) Separate control gears:

For any separate control gear that is placed on the EU market, the following information shall be displayed on at least one free-access website, including a website optimised for mobile devices:

- (a) the information specified in point 3(b)(2), except 3(b)(2)(h);
- (b) the outer dimensions in mm;
- (c) the mass in grams of the control gear, without packaging, and without lighting control parts and non-lighting parts, if any and if they can be physically separated from the control gear;
- (d) instructions on how to remove lighting control parts and non-lighting parts, if any, or how to switch them off or minimise their power consumption during control-gear testing for market surveillance purposes;
- (e) if the control gear can be used with dimmable light sources, a list of minimum characteristics that the light sources should have to be fully compatible with the control gear during dimming, and possibly a list of compatible dimmable light sources;
- (f) recommendations on how to dispose of it at the end of its life in line with Directive 2012/19/EU<sup>3</sup>.

~~In accordance with point 3(b)(2)(h) of this Annex, the website optimised for mobile devices shall be linked to a QR-code on the packaging of the separate control gear.~~

<sup>3</sup> Directive 2012/19/EU of the European Parliament and of the Council of 4 July 2012 on waste electrical and electronic equipment (WEEE), OJ L 197, 24.7.2012, p. 38.



The information does not need to use the exact wording in the list above. Alternatively, it may be displayed in the form of graphs, drawings or symbols.

~~Information on separate control gears that are no longer in production or that are not, or no longer, intended for sale in the European Union should shall be clearly marked as such and/or moved to a separate section of the website.~~

(d) Technical documentation

~~(1)~~ Light sources:

~~Light sources within the scope of this Regulation are within the scope of Regulation (EU) [OP, please insert here references of the accompanying energy labelling regulation] supplementing Regulation (EU) 2017/1369 with regard to energy labelling for light sources. The technical documentation for the purposes of conformity assessment pursuant to Article 5 of this Regulation shall include the information in the order and as set out in Annex VI of Regulation (EU) [OP, please insert here references of the accompanying energy labelling regulation]. For market surveillance purposes, the verification procedure set out in Annex IV to this Regulation applies; manufacturers may refer to the technical documentation uploaded to the product database which contains the same information in accordance with Regulation (EU) [OP, please insert here references of the accompanying energy labelling regulation].~~

~~(2)~~(1) Separate control gears:

The information specified in point 3(c)(2) of this Annex shall also be contained in the technical documentation file drawn up for the purposes of conformity assessment pursuant to Article 8 of Directive 2009/125/EC.

~~(e)~~ Information for products specified in Annex III, point 3

~~For the light sources and separate control gears specified in Annex III, point 3, the intended purpose shall be stated in the technical documentation for compliance assessment as per Article 5 of this Regulation and on all forms of packaging, product information and advertisement, together with an explicit indication that the light source or separate control gear is not intended for use in other applications.~~

~~In particular for light sources indicated in Annex III, point 3(p), it shall be stated: 'This light source is only for use by photo-sensitive patients. Use of this light source will lead to increased energy cost compared to an equivalent more energy efficient product.'~~

### ANNEX III

#### Exemptions

1. This Regulation shall not apply to light sources and separate control gears specifically tested and approved to operate:
- (a) in potentially explosive atmospheres, as defined in Directive 2014/34/EU of the European Parliament and of the Council<sup>4</sup>;
  - (b) for emergency use, as set out in Directive 2014/35/EU of the European Parliament and of the Council<sup>5</sup>;
  - (c) in radiological and nuclear medicine installations, as defined in Article 3 of Directive 2009/71/EURATOM<sup>6</sup>;
  - (d) in or on military or civil defence establishments, equipment, ground vehicles, marine equipment or aircraft, as set out in Member States' regulations or in documents issued by the European Defence Agency;
  - (e) in or on motor vehicles, their trailers and systems, interchangeable towed equipment, components and separate technical units as set out in Regulation (EC) No 661/2009 of the European Parliament and of the Council<sup>7</sup>, Regulation (EU) No 167/2013 of the European Parliament and of the Council<sup>8</sup> and Regulation (EU) No 168/2013 of the European Parliament and of the Council<sup>9</sup>;
  - (f) in or on non-road mobile machinery as set out in Regulation (EU) 2016/1628 of the European Parliament and of the Council<sup>10</sup> and in or on their trailers;
  - (g) in or on interchangeable equipment as set out in Directive 2006/42/EC<sup>11</sup> intended to be towed or to be mounted and fully raised from the ground or that

<sup>4</sup> Directive 2014/34/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to equipment and protective systems intended for use in potentially explosive atmospheres (recast), OJ L 96, 29.3.2014, p. 309-356.

<sup>5</sup> Directive 2014/35/EU of the European Parliament and of the Council of 26 February 2014 on the harmonisation of the laws of the Member States relating to the making available on the market of electrical equipment designed for use within certain voltage limits, OJ L 96, 29.3.2014, p. 357.

<sup>6</sup> Council Directive 2009/71/Euratom of 25 June 2009 establishing a Community framework for the nuclear safety of nuclear installations, OJ L 172, 2.7.2009, p. 18-22.

<sup>7</sup> Regulation (EC) No 661/2009 of the European Parliament and of the Council of 13 July 2009 concerning type-approval requirements for the general safety of motor vehicles, their trailers and systems, components and separate technical units intended therefor, OJ L 200, 31.7.2009, p. 1-24.

<sup>8</sup> Regulation (EU) No 167/2013 of the European Parliament and of the Council of 5 February 2013 on the approval and market surveillance of agricultural and forestry vehicles, OJ L 60, 2.3.2013, p. 1-51.

<sup>9</sup> Regulation (EU) No 168/2013 of the European Parliament and of the Council of 15 January 2013 on the approval and market surveillance of two- or three-wheel vehicles and quadricycles, OJ L 60, 2.3.2013, p. 52.

<sup>10</sup> Regulation (EU) 2016/1628 of the European Parliament and of the Council of 14 September 2016 on requirements relating to gaseous and particulate pollutant emission limits and type-approval for internal combustion engines for non-road mobile machinery, amending Regulations (EU) No 1024/2012 and (EU) No 167/2013, and amending and repealing Directive 97/68/EC, OJ L 252, 16.9.2016, p. 53-117.

<sup>11</sup> Directive 2006/42/EC of the European Parliament and of the Council of 17 May 2006 on machinery, and amending Directive 95/16/EC (recast), OJ L 157, 9.6.2006, p. 24-86

cannot articulate around a vertical axis when the vehicle to which it is attached is in use on a road by vehicles as set out in Regulation (EU) No 167/2013<sup>12</sup>;

(g)(h) in or on civil aviation aircrafts, as set out in Commission Regulation (EU) No 748/2012<sup>13</sup>;

(h)(i) in railway vehicle lighting, as set out in Directive 2008/57/EC of the European Parliament and of the Council<sup>14</sup>;

(i)(j) in marine equipment, as set out in Directive 2014/90/EU of the European Parliament and of the Council<sup>15</sup>;

(j)(k) in medical devices, as set out in Council Directive 93/42/EEC<sup>16</sup> or Regulation (EU) 2017/745<sup>17</sup> and in vitro medical devices as set out in Directive 98/79/EC of the European Parliament and of the Council<sup>18</sup>.

For the purpose of this point, ‘specifically tested and approved’ means that the light source or separate control gear:

- has been specifically tested for the mentioned operating condition or application, according to the European legislation mentioned or related implementing measures, or relevant European or international standards, or, in the absence of these, according to relevant Member States legislation; and
- is accompanied by evidence, to be included in the technical documentation, in the form of a certificate, a type approval mark, a test report ~~or other documentation~~, that the product has been specifically approved for the mentioned operating condition or application; and
- is placed on the market specifically for the mentioned operating condition or application, as evidenced at least by the technical documentation, and except for point (d), information on the packaging and any advertising or marketing materials.

2. In addition, this Regulation shall not apply to:

- (a) double-capped fluorescent T5 light sources with power  $P \leq 13$  W;

<sup>12</sup> Regulation (EU) No 167/2013 of the European Parliament and of the Council of 5 February 2013 on the approval and market surveillance of agricultural and forestry vehicles, OJ L 60, 2.3.2013, p. 1–51

<sup>13</sup> Commission Regulation (EU) No 748/2012 of 3 August 2012 laying down implementing rules for the airworthiness and environmental certification of aircraft and related products, parts and appliances, as well as for the certification of design and production organisations, OJ L 224, 21.8.2012, p. 1–85.

<sup>14</sup> Directive 2008/57/EC of the European Parliament and of the Council of 17 June 2008 on the interoperability of the rail system within the Community (Recast), OJ L 191, 18.7.2008, p. 1–45

<sup>15</sup> Directive 2014/90/EU of the European Parliament and of the Council of 23 July 2014 on marine equipment and repealing Council Directive 96/98/EC, OJ L 257, 28.8.2014, p. 146–185.

<sup>16</sup> Council Directive 93/42/EEC of 14 June 1993 concerning medical devices, OJ L 169, 12.7.1993, p. 1.

<sup>17</sup> Regulation (EU) 2017/745 of the European Parliament and of the Council of 5 April 2017 on medical devices, amending Directive 2001/83/EC, Regulation (EC) No 178/2002 and Regulation (EC) No 1223/2009 and repealing Council Directives 90/385/EEC and 93/42/EEC, OJ L 117, 5.5.2017, p. 1–175

<sup>18</sup> Directive 98/79/EC of the European Parliament and of the Council of 27 October 1998 on in vitro diagnostic medical devices, OJ L331, 7.12.1998, p. 1.

- (b) electronic displays (e.g. televisions, computer monitors, notebooks, tablets, mobile phones, e-readers, game consoles), including ~~but not limited to displays within the scope of Regulation (EU) [OP, please insert here references of the new regulation on ecodesign requirements for electronic displays and TVs], Commission Regulation (EU) No 617/2013<sup>19</sup>, Commission Decision (EU) 2015/1402<sup>20</sup>, Commission Regulation (EC) No 642/2009<sup>21</sup>, Commission Decision (EU) 2016/1756<sup>22</sup>, Commission Communication COM(2015) 178<sup>23</sup>;~~
- ~~(c) light sources in range hoods within the scope of Commission Delegated Regulation (EU) No 65/2014<sup>24</sup>;~~
- (c) light sources and separate control gears in battery-operated products, including but not limited to e.g. torches, mobile phones with an integrated torch light, toys including light sources, desk lamps operating only on batteries, armband lamps for cyclists, solar-powered garden lamps;
- (d) light sources for spectroscopy and photometric applications, such as for example UV-VIS spectroscopy, molecular spectroscopy, atomic absorption spectroscopy, nondispersive infrared (NDIR), fourier-transform infrared (FTIR), medical analysis, ellipsometry, layer thickness measurement, process monitoring or environ-mental monitoring;
- ~~(d)(e)~~ light sources and separate control gears on bicycles and other non-motorised vehicles.

3. Any light source or separate control gear within the scope of this Regulation shall be exempt from the requirements of this Regulation, with the exception of the information requirements set out in Annex II, point 3.e if they are specifically designed and marketed for their intended use in at least one of the following applications:

- (a) signalling (including, but not limited to, road-, railway-, marine- or air traffic-signalling, traffic control or airfield lamps);

<sup>19</sup> Commission Regulation (EU) No 617/2013 of 26 June 2013 implementing Directive 2009/125/EC of the European Parliament and of the Council with regard to ecodesign requirements for computers and computer servers, OJ L 175, 27.6.2013, p. 13.

<sup>20</sup> Commission Decision (EU) 2015/1402 of 15 July 2015 determining the European Union position with regard to a decision of the management entities under the Agreement between the Government of the United States of America and the European Union on the coordination of energy efficiency labelling programmes for office equipment on the revision of specifications for computers included in Annex C to the Agreement, OJ L 217, 18.8.2015, p. 9 (office equipment, computers).

<sup>21</sup> Commission Regulation (EC) No 642/2009 of 22 July 2009 implementing Directive 2005/32/EC of the European Parliament and of the Council with regard to ecodesign requirements for televisions, OJ L 191, 23.7.2009, p. 42 (televisions).

<sup>22</sup> OJ L 268, 1.10.2016, p. 90 (office equipment, displays).

<sup>23</sup> COM(2015) 178 final, 22.4.2015 (related to self-regulatory initiative regarding game consoles).

<sup>24</sup> Commission Delegated Regulation (EU) No 65/2014 of 1 October 2013 supplementing Directive 2010/30/EU of the European Parliament and of the Council with regard to the energy labelling of domestic ovens and range hoods, OJ L 29, 31.1.2014, p. 1.

Hinweis des Herausgebers: Dieser Punkt wurde verschoben; siehe Punkt 3 (b)2 auf Seite 15. ♦ **EN:** Editor's note: This point has been moved. Please see point 3 (b)2 on page 15. ♦ **FR:** Note de l'éditeur : Ce point a été déplacé. Voir point 3 (b)2 sur page 15.



- (b) image capture and image projection (including, but not limited to, photocopying, printing (directly or in pre-processing), lithography, film and video projection, holography);
- (c) light sources with specific effective ultraviolet power >2 mW/klm and intended for use in applications requiring high UV-content;
- (d) light sources with a peak radiation around 253,7 nm and intended for germicidal use (destruction of DNA);
- (e) light sources emitting 5 % or more of total radiation power of the range 250-800 nm in the range of 250-315 nm and/or 20 % or more of total radiation power of the range 250-800 nm in the range of 315-400 nm, and intended for disinfection or fly trapping;
- (f) light sources with the primary purpose of emitting radiation around 185,1 nm and intended to be used for the generation of ozone;
- (g) light sources emitting 40 % or more of total radiation power of the range 250-800 nm in the range of 400-480 nm, and intended for coral zooxanthellae symbioses;
- (h) FL light sources emitting 80 % or more of total radiation power of the range 250-800 nm in the range of 250-400 nm, and intended for sun-tanning;
- (i) HID light sources emitting 40 % or more of total radiation power of the range 250-800 nm in the range of 250-400 nm, and intended for sun-tanning;
- (j) light sources with a photosynthetic efficacy >1.2  $\mu\text{mol/J}$ , and/or emitting 25 % or more of total radiation power of the range 250-800 nm in the range of 700-800 nm, and intended for use in horticulture;
- (k) HID light sources with correlated colour temperature CCT > 7 000 K and intended for use in applications requiring such a high CCT;
- (l) light sources with a beam angle of less than 10° and intended for spot-lighting applications requiring a very narrow light beam;
- (m) halogen light sources with cap-type G9.5, GX9.5, GY9.5, GZ9.5, GZX9.5, GZY9.5, GZZ9.5, K39d, G9.5HPL, G16d, GES/E40 (low voltage (24v) silver crown only), GX16, GX16d, GY16, G22, G38, GX38, GX38Q, P28s, P40s, PGJX28, PGJX 36, PGJX50, R7s with a luminous flux > 12 000 lm, QXL, designed and marketed specifically for scene-lighting use in film studios, TV studios, and photographic studios, or for stage-lighting use in theatres, discos and during concerts or other entertainment events;
- (n) colour-tuneable light sources that can be set to at least the colours listed in this point and which have for each of these colours, measured at the dominant wavelength, a minimum ~~colour~~ excitation purity index of:

Blue	440nm — 490nm	90 %
Green	520nm — <u>5740nm</u>	65 %
Red	610nm — 670nm	95 %

Hinweis des Herausgebers: Das ist wie folgt zu verstehen ...  $\diamond$  **EN**: editor's note: This is to be understood as follows ...  $\diamond$  **FR**: Note de l'éditeur : Ceci doit être compris comme suit ...

Green 520nm — ~~540~~570nm 65 %

and are intended for use in applications requiring high-quality coloured light;

- (o) light sources accompanied by an individual calibration certificate detailing the exact radiometric flux and/or spectrum under specified conditions, and intended for use in photometric calibration (of e.g. wavelength, flux, colour temperature, colour rendering index), or for laboratory use or quality control applications ~~for~~ during the evaluation of coloured surfaces and materials under standard viewing conditions (e.g. standard illuminants);
- (p) light sources provided specifically for use by photosensitive patients, to be sold in pharmacies and other authorised selling points (e.g. suppliers of disability products), upon presentation of a medical prescription;
- (q) incandescent light sources (not including halogen light sources) fulfilling all of the following conditions: power  $\leq 40$  W, length  $\leq 60$  mm, diameter  $\leq 30$  mm, declared suitable for operation at ambient temperature  $\geq 300$  °C, and intended for use in high temperature applications such as ovens;
- (r) halogen light sources fulfilling all of the following conditions: cap-type G4, GY6.35 or G9, power  $\leq 60$  W, declared suitable for operation at ambient temperature  $\geq 300$  °C, and intended for use in high temperature applications such as ovens;
- (s) halogen light sources with blade contact-, metal lug-, cable-, litz wire- or non-standard customised electrical interface, specifically designed and marketed for industrial or professional electro-heating equipment (e.g. stretch blow-moulding process in PET-Industry, 3D-printing, gluing, inks, paint and coating hardening);
- (t) halogen light sources fulfilling all of the following conditions: R7s cap, CCT  $\leq 2\,500$  K, length not in the ranges 75-80 mm and 110-120 mm, specifically designed and marketed for industrial or professional electro-heating equipment (e.g. stretch blow-moulding process in PET-Industry, 3D-printing, gluing, inks, paint and coating hardening);
- (u) single capped fluorescent lamps (CFLni) having a diameter of 16 mm (T5), 2G11 4 pin base, with CCT = 3 200 K and chromaticity coordinates  $x=0,415$   $y=0,377$ , or with CCT=5 500 K and chromaticity coordinates  $x=0,330$   $y=0,335$ , specifically designed and marketed for studio and video applications for traditional filmmaking.
- (v) LED or OLED light sources, complying with the definition of 'original works of art' as defined in Directive 2001/84/EC, made by the artist him/herself in a limited number below 10 pieces;
- (w) white light sources which
  - (1) are designed and marketed specifically for scene-lighting use in film-studios, TV-studios and locations, and photographic-studios and locations, or for stage-lighting use in theatres, during concerts or other entertainment events;

and which

(2) provide two or more of the following specifications:

- (a) LED with high CRI > 90;
- (b) GES/E40, K39d socket with changeable Colour Temperature down to 1800 K (undimmed), used with low voltage power supply;
- (c) LED rated at 180W and greater and arranged to direct output to an area smaller than the light emitting surface;
- (d) DWE lamp type which is a tungsten lamp defined by its wattage (650 W) voltage (120 V) and terminal type (pressure screw terminal);
- (e) white bi-colour LED sources;
- (f) fluorescent tubes: Min BI Pin T5 and Bi Pin T12 with CRI ≥ 85 and CCT 2 900, 3 000, 3 200, 5 600 or 6 500 K.

4. CLS and CSCG designed and marketed specifically for scene-lighting use in film-studios, TV-studios and locations, and photographic-studios and locations, or for stage-lighting use in theatres, discos and during concerts or other entertainment events, for connection to high speed control networks (utilising signalling rates of 250,000 bits per second and higher) in always-listening mode, shall be exempt from the requirements on standby (Psb) and on networked standby (Pnet) of Annex II 1.a and 1.b.

## ANNEX IV

### Verification procedure for market surveillance purposes

The verification tolerances defined in this Annex relate only to the verification of the measured parameters by Member State authorities. These tolerances shall not be used by the manufacturer, ~~or importer or authorised representative~~ as an allowed tolerance to establish the values in the technical documentation or in interpreting these values with a view to achieving compliance or to communicate better performance by any means.

Where a model has been designed to be able to detect it is being tested (e.g. by recognising the test conditions or test cycle), and to react specifically by automatically altering its performance during the test with the objective of reaching a more favourable level for any of the parameters specified in this Regulation or included in the technical documentation or included in any of the documentation provided, the model and all equivalent models shall be considered not compliant.

When verifying the compliance of a product model with the requirements laid down in this Regulation pursuant to Article 3(2) of Directive 2009/125/EC, the authorities of the Member States shall apply the following procedure:

1. The Member State authorities shall verify one single unit of the model for points 2(a) and 2(b) of this Annex.  
  
The Member State authorities shall verify 10 units of the light source model or 3 units of the separate control gear model, ~~supplied from at least two different sources, for point 2(c) of this Annex. For light sources, if the acquisition costs for the 10 units exceed 500 euros, the authorities of the Member State may reduce the sample size to 3 units. The verification tolerances are laid down in Table 6 of this Annex.~~
2. The model shall be considered to comply with the applicable requirements if:
  - (a) the values given in the technical documentation pursuant to point 2 of Annex IV to Directive 2009/125/EC (declared values), and, where applicable, the values used to calculate these values, are not more favourable for the manufacturer, ~~or importer or authorised representative~~ than the results of the corresponding measurements carried out pursuant to paragraph (g) thereof; and
  - (b) the declared values meet any requirements laid down in this Regulation, and any required product information published by the manufacturer ~~or importer or authorised representative~~ does not contain values that are more favourable for the manufacturer, ~~or importer or authorised representative~~ than the declared values; and
  - (c) when the authorities of the Member State test the units of the model, the determined values comply with the respective verification tolerances as given in Table 6 of this Annex, where 'determined value' means the arithmetical mean over the tested units of the measured values for a given parameter or the arithmetical mean of parameter values calculated from ~~other~~ measured values.
3. If the results referred to in point 2(a), ~~or (b) or (c)~~ are not achieved, the model and all equivalent models ~~that have been listed as equivalent models in the~~



manufacturer's or importer's technical documentation shall be considered not to comply with this Regulation.

4. If the result referred to in point 2(c) is not achieved, the model and all models that have been listed as equivalent models in the manufacturer's or the importer's technical documentation shall be considered not to comply with this Regulation.

5.4. The authorities of the Member State shall provide all relevant information to the authorities of the other Member States and to the Commission without delay after a decision is taken on the non-compliance of the model in accordance with points 3 and 4 of this Annex.

The authorities of the Member State shall only apply the verification tolerances that are set out in Table 6 and shall use only the procedure described in this Annex. For the parameters in Table 6, No other tolerances, such as those set out in harmonised standards or in any other measurement method, shall be applied.

**Table 6 Verification tolerances**

Parameter	Sample size	Verification tolerances
<b>Full-load on-mode power <math>P_{on}</math> [W]:</b>		
$P_{on} \leq 2W$	3	The determined value shall not exceed the declared value by more than 0,20 W.
	10	The determined value shall not exceed the declared value by more than 0,20 W.
$2W < P_{on} \leq 5W$	3	The determined value shall not exceed the declared value by more than 10 %.
	10	The determined value shall not exceed the declared value by more than 10 %.
$5W < P_{on} \leq 25W$	3	The determined value shall not exceed the declared value by more than 10 %.
	10	The determined value shall not exceed the declared value by more than 5 %.
$25W < P_{on} \leq 100W$	3	The determined value shall not exceed the declared value by more than 7,5 %.
	10	The determined value shall not exceed the declared value by more than 5 %.
$100W < P_{on}$	3	The determined value shall not exceed the declared value by more than 5 %.
	10	The determined value shall not exceed the declared value by more than 2,5 %.
<b>Displacement factor [0-1]</b>	3	The determined value shall not be less than the declared value minus 0,1 units.
	10	The determined value shall not be less than the declared value minus 0,1 units.
<b>Useful luminous flux <math>\Phi_{use}</math> [lm]</b>	3	The determined value shall not be less than deviate from the declared value minus by more than 10 % and shall not exceed the declared value by more than 20 %.
	10	The determined value shall not deviate from the declared value minus by more than 5-10 %.
<b>No-load power <math>P_{no}</math>, Standby power <math>P_{sb}</math> and Networked standby power</b>	3	The determined value shall not exceed the declared value by more than 0,10 W.

<b>P<sub>net</sub> [W]</b>	10	The determined value shall not exceed the declared value by more than 0,10 W.
<b>CRI [0-100]</b>	3	The determined value shall not be less than the declared value by more than 3,0 units.
	10	The determined value shall not be less than the declared value by more than 2,0 units.
<b>Flicker [P<sub>st</sub> LM] and stroboscopic effect [SVM]</b>	3	The determined value shall not exceed the declared value by more than 10 %.
	10	The determined value shall not exceed the declared value by more than 10 %.
<b>Colour consistency [MacAdam ellips steps]</b>	3	The determined number of steps shall not exceed the declared number of steps. The centre of the MacAdam ellipse shall be the centre declared by the supplier with a tolerance of 0,04 units.
	10	The determined number of steps shall not exceed the declared number of steps. The centre of the MacAdam ellipse shall be the centre declared by the supplier with a tolerance of 0,005 units.
<b>Beam angle (degrees)</b>	3	The determined value shall not deviate from the declared value by more than 25 %.
	10	The determined value shall not deviate from the declared value by more than 25 %.
<b>Control gear efficiency [0-1]</b>	3	The determined value shall not be less than the declared value minus 0,05 units.
	40	The determined value shall not be less than the declared value minus 0,025 units.
<b>Efficacy [lm/W]</b>	3	The determined value (quotient) shall not be less than the declared value minus 10 %.
	10	The determined value (quotient) shall not be less than the declared value minus 5 %.
<b>L<sub>70</sub>B<sub>50</sub> lifetime (for LED and OLED)</b>	3	The determined value shall not be less than the declared value minus 20 %.
	10	The determined value shall not be less than the declared value minus 10 %.
<b>Lumen maintenance factor (for LED and OLED)</b>	3	The determined X <sub>LMF</sub> % of the sample following the test in Annex V of this Regulation shall not be less than X <sub>LMF, MIN</sub> % <sup>25</sup> .
	10	
<b>Survival factor (for LED and OLED)</b>	3	All 3 light sources of the test sample must be operational after completing the test in Annex V of this Regulation.
	10	At least 9 light sources of the test sample must be operational after completing the test in Annex V of this Regulation.
<b>Excitation Colour purity index [%]</b>	3	The determined value shall not be less than the declared value minus 10 %.
	10	The determined value shall not be less than the declared value minus 5 %.
<b>Correlated colour temperature [K]</b>	3	The determined value shall not deviate from the declared value by more than 10 %.
	10	The determined value shall not deviate from the declared value by more than 5 10 %.

<sup>25</sup>

There is no tolerance associated with this metric, as it is a fixed requirement and it is up to the manufacturer to declare an L<sub>70</sub>B<sub>50</sub> value to meet it.

For light sources with linear geometry which are scalable but of very long length, such as LED strips or strings, verification testing of market surveillance authorities shall consider a length of 50 cm, or, if the light source is not scalable there, the nearest value to 50 cm. The light source manufacturer or importer shall indicate which separate control gear is suitable for this length.

When verifying if a product is a light source, market surveillance authorities shall compare the measured values for chromaticity coordinates (x and y), luminous flux, luminous flux density, and colour rendering index directly with the limit values set out in the definition for light source of Article 2 of this Regulation, without applying any tolerances. If any of the 3 of 10 units in the sample satisfies the conditions for being a light source, the product model shall be considered to be a light source.

Light sources that allow the end-user to control, manually or automatically, directly or remotely, the luminous intensity, colour, correlated colour temperature, spectrum, and/or beam angle of the emitted light shall be evaluated using the reference control settings.

## ANNEX V

### Functionality after endurance testing

Models of LED- and OLED- light sources shall undergo endurance testing to verify their lumen maintenance and survival factor. This endurance testing consists of the test method outlined below. The authorities of a Member State shall test 10 units of the model for this test. ~~However, if the acquisition costs for 10 units exceed EUR 500, the authorities of a Member State have the option to reduce the sample size to 3 units.~~

The endurance test for LED and OLED light sources shall be conducted as follows:

- (a) Ambient conditions and test setup:
  - (i) The switching cycles are to be conducted in a room with an ambient temperature of  $25 \pm 10$  °C and an average air velocity of less than 0,2 m/s.
  - (ii) The switching cycles on the sample shall be conducted in free air in a vertical base-up position. However, if a manufacturer or importer has declared the light source suitable for use in a specific orientation only, then the sample shall be mounted in that orientation.
  - (iii) The applied voltage during the switching cycles shall have a tolerance within 2 %. The total harmonic content of the supply voltage shall not exceed 3 %. Standards provide guidance on the supply voltage source. Light sources designed to be operated on mains voltage shall be tested at 230 V, 50 Hz supply, even if the products are able to be operated on variable supply conditions.
- (b) ~~Provisional~~ Endurance test method:
  - (i) Initial flux measurement: measure the luminous flux of the light source prior to starting the endurance test switching cycle.
  - (ii) Switching cycles: operate the light source for 1 200 cycles of repeated, continuous switching cycles without interruption. One complete switching cycle consists of 150 minutes of the light source switched ON at full power followed by 30 minutes of the light source switched OFF. The hours of operation recorded (i.e., 3 000 hours) include only the periods of the switching cycle when the light source was switched ON, i.e. the total test time is 3 600 hours.
  - (iii) Final flux measurement: at the end of the 1 200 switching cycles, note if any ~~lamps~~ light sources have failed (see 'Survival factor' in Annex IV, Table 6 of this Regulation) and measure the luminous flux of the light sources that have not failed.
  - (iv) For each of the units in the sample which have not failed, divide the measured final flux by the measured initial flux. Average the resulting values over all the units that did not fail to compute the determined value for the lumen maintenance factor  $X_{LMF}$  %.

## **ANNEX VI**

### **Benchmarks**

For the environmental aspects that were considered significant and are quantifiable, the best available technology on the market, at the time of entry into force of this Regulation, is indicated below.

The best available technology on the market for light sources in terms of their efficacy based on useful luminous flux was identified as follows:

- Mains voltage ~~N~~non-directional light sources: 120-140 lm/W
- Mains voltage directional light sources: 90-100 lm/W
- ~~Extra low voltage~~ directional light sources not operating on the mains: 85- 95 lm/W
- Linear light sources (tubes): 140-160 lm/W

The best available technology on the market for separate control gears ~~has~~ve an energy efficiency of 95 %.

Features required in certain applications, e.g. a high colour rendering, might prevent products offering those features from achieving these benchmarks.

The best available technology on the market for light sources and separate control gears do not have any mercury content.

---

## Anhang ◇ Annex ◇ Annexe

### Kontakt Daten

Christoph Mordziol  
Umweltbundesamt (UBA)  
Fachgebiet V 1.4 –  
Energieeffizienz

Wörlitzer Platz 1  
06844 Dessau-Roßlau  
Deutschland

☎ +49 - 340 / 21 03-22 57  
christoph.mordziol@uba.de

<https://www.umweltbundesamt.de/themen/klima-energie/energiesparen/licht>

### Contact data

Christoph Mordziol  
Federal Environment Agency  
Section V 1.4 – Energy  
Efficiency

Germany

### Cordonnées

Christoph Mordziol  
Agence Fédérale de  
l'Environnement  
Unité V 1.4 – Efficacité  
Énergétique

Allemagne

(Datei „ErP-RL\_2019-02-11-1939\_n\_\_43-VO-LqGes\_Arbeitshilfe-02p2-Ef.docx“)